

William Stallings

Data and Computer Communications

Chapter 3

Data Transmission

Terminology (1)

⌘ Transmitter

⌘ Receiver

⌘ Medium

Guided medium

e.g. twisted pair, optical fiber

Unguided medium

e.g. air, water, vacuum

Terminology (2)

⌘ Direct link

- ☒ No intermediate devices

⌘ Point-to-point

- ☒ Direct link
- ☒ Only 2 devices share link

⌘ Multi-point

- ☒ More than two devices share the link

Terminology (3)

⌘ Simplex

- ☒ One direction
 - ☒ e.g. Television

⌘ Half duplex

- ☒ Either direction, but only one way at a time
 - ☒ e.g. police radio

⌘ Full duplex

- ☒ Both directions at the same time
 - ☒ e.g. telephone

Frequency, Spectrum and Bandwidth

⌘ Time domain concepts

☒ Continuous signal

☒ Various in a smooth way over time

☒ Discrete signal

☒ Maintains a constant level then changes to another constant level


☒ Periodic signal

☒ Pattern repeated over time


☒ Aperiodic signal

☒ Pattern not repeated over time


Continuous & Discrete Signals

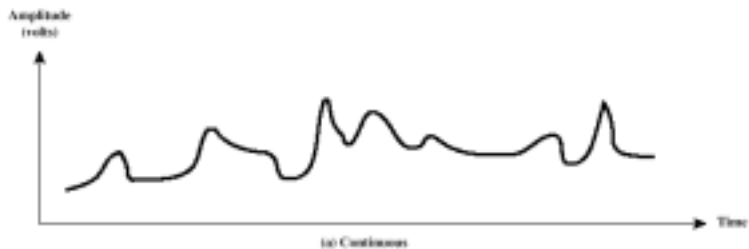

Periodic Signals

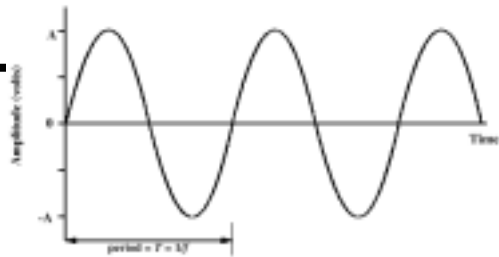

(a) Sine wave

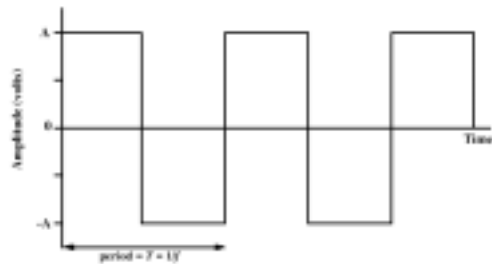

(b) Square wave

Sine Wave

⌘ Peak Amplitude (A)

- ☑ maximum strength of signal
- ☑ volts


⌘ Frequency (f)

- ☑ Rate of change of signal
- ☑ Hertz (Hz) or cycles per second
- ☑ Period = time for one repetition (T)
- ☑ $T = 1/f$

⌘ Phase (ϕ)

- ☑ Relative position in time

Varying Sine Waves

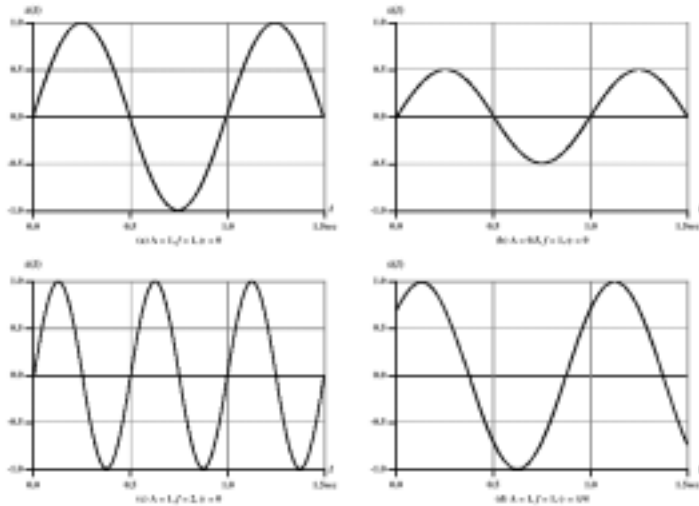




Wavelength

- ⌘ Distance occupied by one cycle
- ⌘ Distance between two points of corresponding phase in two consecutive cycles
- ⌘ λ
- ⌘ Assuming signal velocity v
 - ☒ $\lambda = vT$
 - ☒ $\lambda f = v$
 - ☒ $c = 3 \times 10^8 \text{ ms}^{-1}$ (speed of light in free space)


Frequency Domain Concepts

- ⌘ Signal usually made up of many frequencies
- ⌘ Components are sine waves
- ⌘ Can be shown (Fourier analysis) that any signal is made up of component sine waves
- ⌘ Can plot frequency domain functions

Addition of Frequency Components

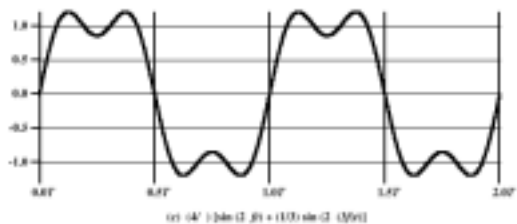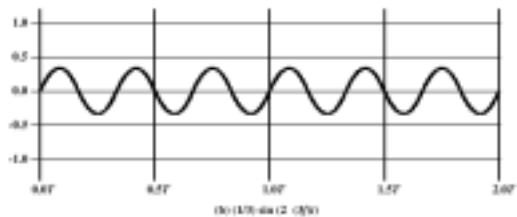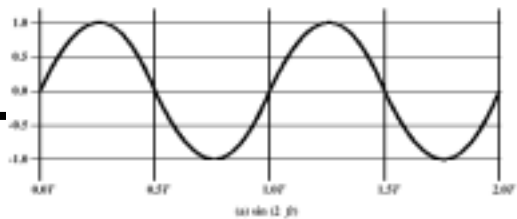

Frequency Domain

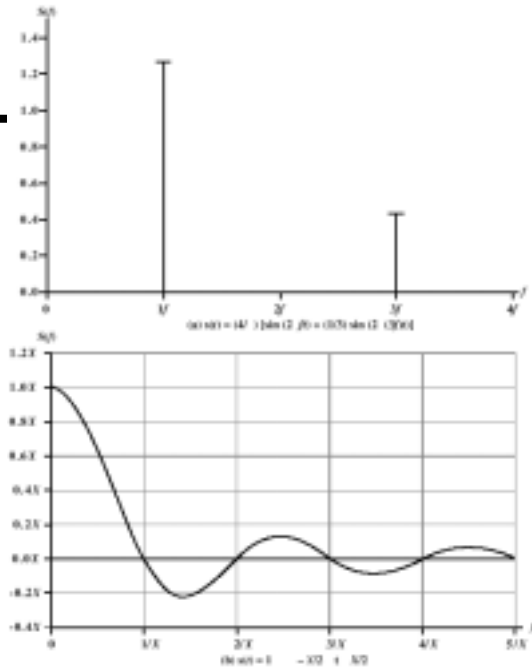

Spectrum & Bandwidth

⌘ Spectrum

- ☑ range of frequencies contained in signal

⌘ Absolute bandwidth

- ☑ width of spectrum


⌘ Effective bandwidth

- ☑ Often just *bandwidth*
- ☑ Narrow band of frequencies containing most of the energy

⌘ DC Component

- ☑ Component of zero frequency

Signal with DC Component

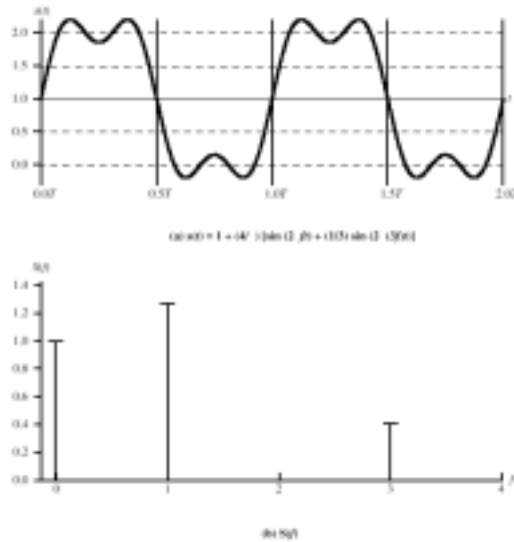

Data Rate and Bandwidth

- ⌘ Any transmission system has a limited band of frequencies
- ⌘ This limits the data rate that can be carried

Analog and Digital Data Transmission

⌘ Data

- ☒ Entities that convey meaning

⌘ Signals

- ☒ Electric or electromagnetic representations of data

⌘ Transmission

- ☒ Communication of data by propagation and processing of signals

Data


⌘ Analog

- ☒ Continuous values within some interval
- ☒ e.g. sound, video

⌘ Digital

- ☒ Discrete values
- ☒ e.g. text, integers

Acoustic Spectrum (Analog)

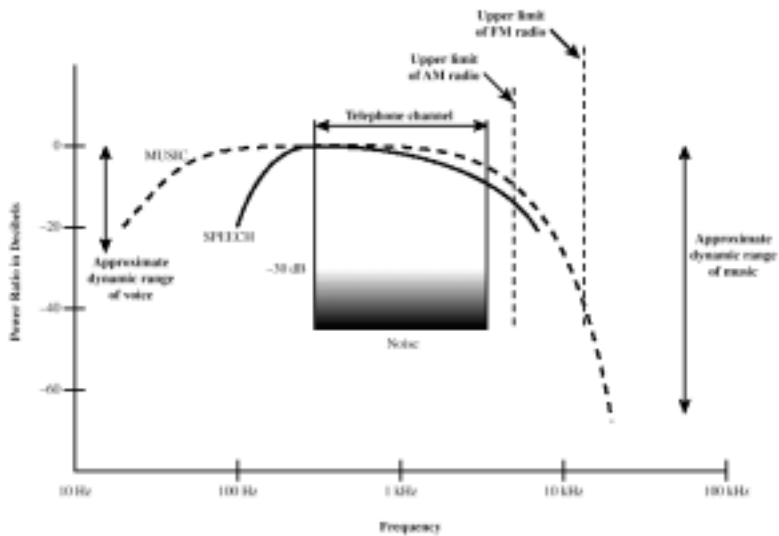

Signals

⌘ Means by which data are propagated

⌘ Analog

- Continuously variable
- Various media
 - wire, fiber optic, space
- Speech bandwidth 100Hz to 7kHz
- Telephone bandwidth 300Hz to 3400Hz
- Video bandwidth 4MHz


⌘ Digital

- Use two DC components


Data and Signals

- ⌘ Usually use digital signals for digital data and analog signals for analog data
- ⌘ Can use analog signal to carry digital data
 - ☒ Modem
- ⌘ Can use digital signal to carry analog data
 - ☒ Compact Disc audio

Analog Signals Carrying Analog and Digital Data

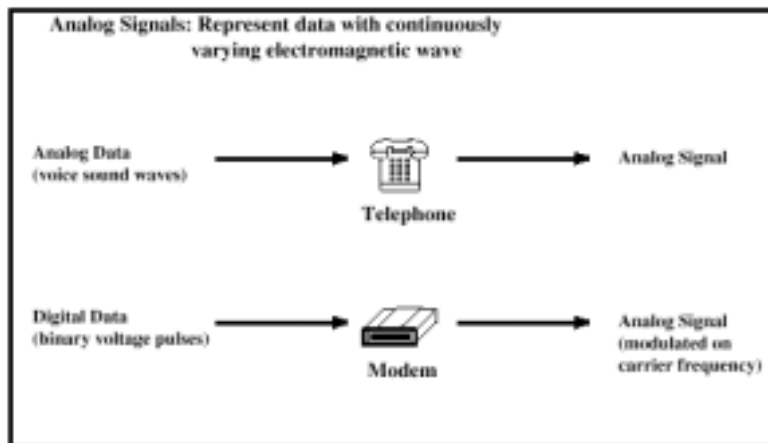

Digital Signals Carrying Analog and Digital Data

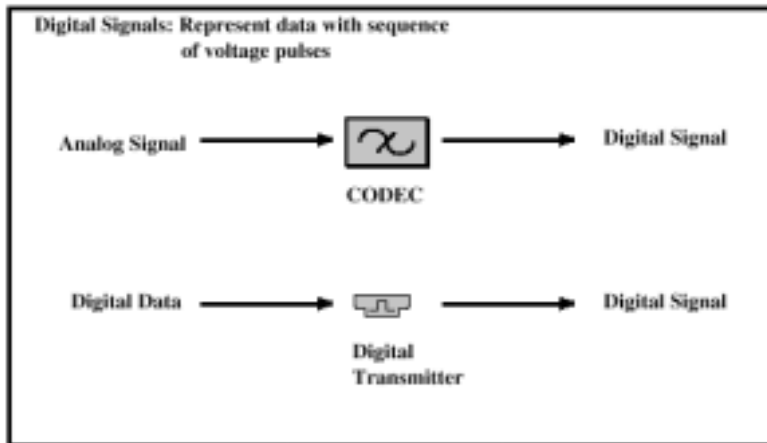

Analog Transmission

- ⌘ Analog signal transmitted without regard to content
- ⌘ May be analog or digital data
- ⌘ Attenuated over distance
- ⌘ Use amplifiers to boost signal
- ⌘ Also amplifies noise

Digital Transmission

- ⌘ Concerned with content
- ⌘ Integrity endangered by noise, attenuation etc.
- ⌘ Repeaters used
- ⌘ Repeater receives signal
- ⌘ Extracts bit pattern
- ⌘ Retransmits
- ⌘ Attenuation is overcome
- ⌘ Noise is not amplified

Advantages of Digital Transmission

- ⌘ Digital technology
 - ☒ Low cost LSI/VLSI technology
- ⌘ Data integrity
 - ☒ Longer distances over lower quality lines
- ⌘ Capacity utilization
 - ☒ High bandwidth links economical
 - ☒ High degree of multiplexing easier with digital techniques
- ⌘ Security & Privacy
 - ☒ Encryption
- ⌘ Integration
 - ☒ Can treat analog and digital data similarly

Transmission Impairments

- ⌘ Signal received may differ from signal transmitted
- ⌘ Analog - degradation of signal quality
- ⌘ Digital - bit errors
- ⌘ Caused by
 - ☒ Attenuation and attenuation distortion
 - ☒ Delay distortion
 - ☒ Noise

Attenuation

- ⌘ Signal strength falls off with distance
- ⌘ Depends on medium
- ⌘ Received signal strength:
 - ☒ must be enough to be detected
 - ☒ must be sufficiently higher than noise to be received without error
- ⌘ Attenuation is an increasing function of frequency

Delay Distortion

- ⌘ Only in guided media
- ⌘ Propagation velocity varies with frequency

Noise (1)

- ⌘ Additional signals inserted between transmitter and receiver
- ⌘ Thermal
 - ☒ Due to thermal agitation of electrons
 - ☒ Uniformly distributed
 - ☒ White noise
- ⌘ Intermodulation
 - ☒ Signals that are the sum and difference of original frequencies sharing a medium

Noise (2)

⌘ Crosstalk

- ☒ A signal from one line is picked up by another

⌘ Impulse

- ☒ Irregular pulses or spikes
- ☒ e.g. External electromagnetic interference
- ☒ Short duration
- ☒ High amplitude

Channel Capacity

⌘ Data rate

- ☒ In bits per second
- ☒ Rate at which data can be communicated

⌘ Bandwidth

- ☒ In cycles per second of Hertz
- ☒ Constrained by transmitter and medium

Required Reading

⌘ Stallings chapter 3