


4 STROMBERG-CARLSON CO. I268 MAGNETO DESK SET BOX USED WITH I244 DESK SET

DESK SET CORD OF I244 TELEPHONE
(SEE NOTE 1)

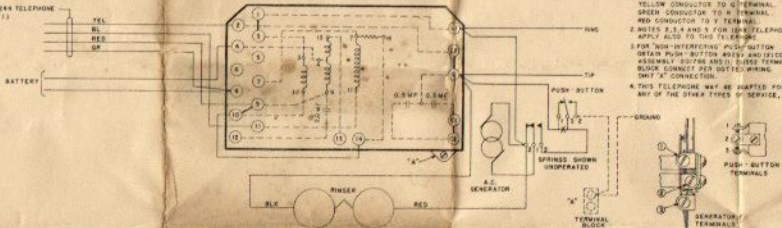


NOTES FOR I268

1. HANDSET CORDS OF I244 TELEPHONE MUST BE CONNECTED AS FOLLOWS:
YELLOW CONDUCTOR TO G TERMINAL.
GREEN CONDUCTOR TO H TERMINAL.
RED CONDUCTOR TO Y TERMINAL.
2. NOTES 2, 3, 4 AND 5 FOR I244 TELEPHONE APPLY ALSO TO THIS TELEPHONE.
3. FOR "NON-INTERFERING" PUSH-BUTTON OBTAIN PUSH-BUTTON ASSEMBLY 200796 AND I21CORD ASSEMBLY 200796 AND I21CORD TERMINAL BLOCK CONNECT PER DOTTED WIRING, OMIT "A" CONNECTION.
4. THIS TELEPHONE MAY BE ADAPTED FOR ANY OF THE OTHER TYPES OF SERVICE.

NOTES FOR I248 AND I258

1. YELLOW OF LINE CORD IS NOT TO BE GROUNDED, EXCEPT WHEN NOTE 5 IS USED.
2. FOR REDUCED SIDETONE ON LONG NON-LOADED CABLE LOOPS OMIT STRAP 14 TO 10 AND CONNECT A 20355 ASSEMBLY BETWEEN TERMINALS Y TO G.
3. CIRCUIT IS SHOWN WITHOUT "SURE-RING" CONDENSER THIS GIVES BEST CONDITION FOR SIDETONE BALANCE. IF "SURE-RING" CONDENSER IS REQUIRED, REPLACE STRAP 1-2 TO G BY A STRAP FROM L-2 TO C-2. IF 1 MF DOES NOT GIVE SATISFACTORY SURE-RING, 1/2 MF SURE-RING MAY BE PROVIDED FOR BY STRAPPINGS AS ABOVE AND REMOVING STRAP C-1 TO C-2.
4. FOR HARMONIC RINGING (WITHOUT SURE-RING OPERATION) RECONNECT BLACK OF RINGER TO C-1 INSTEAD OF TO G. FOR HARMONIC RINGING AND SURE-RING OPERATION STRAP L-2 TO C-2 INSTEAD OF L-2 TO G. AND REMOVE STRAP C-1 TO C-2 AND CONNECT BLACK OF RINGER TO C-1 INSTEAD OF TO G.
5. FOR "SILENT-RINGER" MOVE RED OF RINGER TO CENTER TERMINAL OF GENERATOR SWITCH.
6. FOR "NON-INTERFERING" PUSH-BUTTON REPLACE DIAL BLANK WITH 200846 DIAL BLANK, ALSO INSTALL 201350 TERMINAL BLOCK MOUNT UNDER MOUNTING SCREW OF 200595 AT "A". THESE (WITH 27 CONDUCTING WIRES) MAY BE OBTAINED IN PACKAGE ASSEMBLY 201350. CONNECT PER DOTTED WIRING, OMITTING "A" CONNECTIONS.
7. TO USE TWO-STEP HOOKSWITCH OPERATION, BEND TAB ON NAME PLATE LEVER INWARD. NO CIRCUIT CHANGE IS REQUIRED.
8. TO CONVERT TO I243, REMOVE SUB-BASE AND GENERATOR, REMOUNT 200595 AND RINGER AND REVISE PER CIRCUIT 1, No. 205833. (I-243 ONLY)
9. TO CONVERT TO I247, REMOVE SUB-BASE AND GENERATOR, REMOUNT 200595 AND RINGER, ADD INDUCTION COIL 200604 AND REVISE PER CIRCUIT 2, No. 205833. (I-247 ONLY) NEW HANDSET CORD REQUIRED.
10. TO CONVERT TO I250 SAME AS FOR I243 (I-250 ONLY)



5 WIRING AND CONNECTIONS FOR BRIDGED RINGING FOR I248 & I258 TELEPHONES (MAGNETO)

