


JT-11P-1 BALANCED LINE LEVEL TO UNBALANCED GUITAR LEVEL CONVERTOR

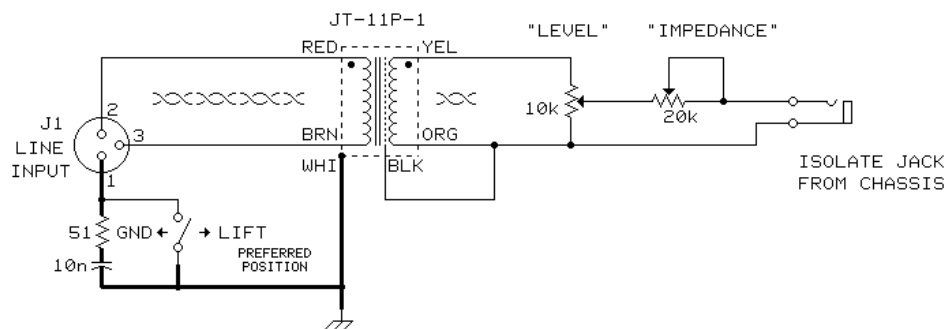

NOTES:

1. PRIMARY (RED/BRN) AND SECONDARY (YEL/ORG) LEADS SHOULD BE TWISTED AS SHOWN AND WIRING SHOWN AS THICK LINE SHOULD BE HEAVY GAUGE AND AS SHORT AND DIRECT AS POSSIBLE.
2. LEVEL POTENTIOMETER SHOULD BE AUDIO TAPER TYPE.
3. IMPEDANCE POTENTIOMETER CAN BE EITHER AUDIO OR LINEAR TAPER.

jensen

AS092

01/30/02

7135 HAYVENHURST AVE.
VAN NUYS, CALIFORNIA 91406
(818) 374-5857

© COPYRIGHT 2001, 1995 JENSEN TRANSFORMERS, INC.