

# BFGoodrich® Tires


## Radial T/A®

### FEATURES:

- 1 **g-Wedge™** Technology
- 2 **Unique Tread Block Phasing**
- 3 **New Tread Compounding and Variable Groove Angle Geometry**
- 4 **Polyester/Steel/Nylon (50-series only) Construction**
- 5 **All-Season (M&S Rated); S-Speed Rated**
- 6 **Raised White and Enhanced Black Sidewall Graphics**

### BENEFITS:

- Advanced sidewall stabilizer for improved lateral stability and steering response
- Permits high performance with low noise levels
- Yields longer, even wear/better wet traction, while maintaining dry traction
- Insures maximum carcass strength, higher stiffness and crisp handling
- Genuine, all-season traction and performance; speed capabilities of up to 112 mph
- Reversible; styling to complement any vehicle

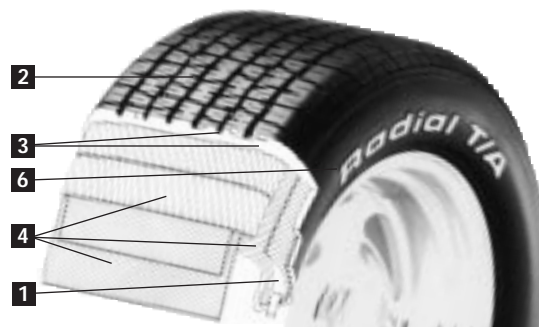

### UTQG Data

Description	Treadwear	Traction	Temperature
13"	360	A	B
14"/15"/16"	400	A	B

### Engineering Data

New Size	Load Index-Speed Symbol	Stock Number	MSPN Number	Rim Width Range (inches)	Inflated Dimensions (inches)*				Revs/Mile at 45 mph	Center Skid Depth (32nds of an inch)	Maximum Load (lbs) and Inflation (psi)	
					Overall Diameter	Tread Width	Section Width on Measuring Rim Width**	Static Loaded Radius				
<b>Raised White Letters</b>												
	P175/70R13	82S	285-308	46604	4.5-6.0	22.7	5.2	7.0 on 5.0	10.0	916	12	1036 @ 35
	P195/60R13	83S	265-305	81573	5.0-7.5	22.2	6.3	7.9 on 6.0	10.0	937	11	1080 @ 35
	P205/60R13	86S	265-309	55222	5.5-8.0	22.7	6.6	8.2 on 6.0	10.2	916	11	1179 @ 35
	P215/50R13	84S	275-307	91781	6.0-8.5	21.5	7.0	8.9 on 7.0	9.7	967	11	1091 @ 35
<b>New 3Q</b>	<b>P185/70R14</b>	<b>87S</b>	<b>285-410</b>	<b>50618</b>	<b>4.5-6.5</b>	<b>24.3</b>	<b>5.5</b>	<b>7.4 on 5.5</b>	<b>10.7</b>	<b>856</b>	<b>12</b>	<b>1201 @ 35</b>
	P195/60R14	85S	265-402	84497	5.0-7.5	23.2	6.3	7.9 on 6.0	10.5	897	11	1135 @ 35
	P195/70R14	90S	285-413	48578	5.0-7.0	24.8	5.8	7.9 on 6.0	10.9	839	12	1312 @ 35
	P205/70R14	93S	285-416	66748	5.0-7.5	25.4	6.1	8.2 on 6.0	11.1	819	12	1433 @ 35
	P215/60R14	91S	265-418	98659	5.5-8.5	24.2	7.0	8.7 on 6.5	10.8	860	11	1345 @ 35
	P215/70R14	96S	285-420	50228	5.5-7.5	25.9	6.4	8.7 on 6.5	11.3	803	12	1554 @ 35
	P225/60R14	94S	265-434	53273	6.0-9.0	24.7	7.2	9.0 on 6.5	11.0	842	11	1455 @ 35
<b>New 3Q</b>	<b>P225/70R14</b>	<b>98S</b>	<b>285-459</b>	<b>79604</b>	<b>6.0-8.0</b>	<b>26.5</b>	<b>6.7</b>	<b>9.0 on 6.5</b>	<b>11.5</b>	<b>785</b>	<b>12</b>	<b>1675 @ 35</b>
	P235/60R14	96S	265-477	79644	6.0-9.0	25.1	7.6	9.5 on 7.0	11.2	829	11	1565 @ 35
	P245/50R14	93S	275-536	48000	7.0-9.5	23.7	8.0	10.0 on 7.5	10.7	878	11	1433 @ 35
	P245/60R14	98S	265-486	54322	6.5-9.5	25.6	8.0	9.8 on 7.0	11.3	813	11	1675 @ 35
	P265/50R14	98S	275-559	91337	7.5-10.0	24.5	8.6	10.9 on 8.5	10.9	849	11	1642 @ 35
	P195/60R15	87S	265-487	64472	5.0-7.5	24.2	6.3	7.9 on 6.0	11.0	860	11	1190 @ 35
	P205/60R15	90S	265-515	71072	5.5-8.0	24.7	6.6	8.2 on 6.0	11.2	842	11	1301 @ 35
	P215/60R15	93S	265-510	67797	6.0-8.5	25.2	7.0	8.7 on 6.5	11.3	825	11	1411 @ 35
	P215/65R15	95S	265-587	78624	5.5-7.5	26.0	7.0	8.7 on 6.5	11.6	800	10.5	1510 @ 35
	P215/70R15	97S	285-639	72634	5.5-7.5	26.9	6.4	8.7 on 6.5	11.8	773	12	1620 @ 35
	P225/60R15	95S	265-534	64148	6.0-9.0	25.6	7.2	9.0 on 6.5	11.5	813	11	1521 @ 35
	P225/70R15	100S	285-523	67244	6.0-8.0	27.4	6.7	9.0 on 6.5	12.0	759	12	1753 @ 35
	P235/60R15	98S	265-531	54712	6.0-9.0	26.1	7.6	9.5 on 7.0	11.7	797	11	1642 @ 35
	P235/70R15	102S	285-543	61977	6.0-8.5	28.0	7.0	9.5 on 7.0	12.2	743	12	1896 @ 35
	P245/60R15	100S	265-552	60013	6.5-9.5	26.6	8.0	9.8 on 7.0	11.8	782	11	1753 @ 35
	P255/60R15	102S	265-562	71728	6.5-10.0	27.1	8.2	10.2 on 7.5	12.0	768	11	1885 @ 35
	P255/70R15	108S	285-561	45982	6.5-9.0	29.1	7.6	10.2 on 7.5	12.6	715	12	2183 @ 35
	P265/50R15	99S	275-744	88000	7.5-10.0	25.5	8.6	10.9 on 8.5	11.4	816	11	1720 @ 35
	P275/50R15	101S	275-771	50381	7.5-11.0	25.9	8.9	11.2 on 8.5	11.6	803	11	1830 @ 35
	P275/60R15	107S	265-564	45185	7.0-11.0	28.0	8.9	11.0 on 8.0	12.3	743	11	2149 @ 35
	P285/70R15	115S	285-145	75701	7.5-9.0	30.8	8.5	11.3 on 8.5	13.1	675	12	2679 @ 35
	P295/50R15	105S	275-777	53415	8.0-11.0	26.7	9.5	12.2 on 9.5	11.9	779	11	2061 @ 35
<b>New 1Q</b>	<b>P275/65R16</b>	<b>111S</b>	<b>265-240</b>	<b>93892</b>	<b>7.5-9.0</b>	<b>30.1</b>	<b>8.9</b>	<b>11.0 on 8.0</b>	<b>13.1</b>	<b>691</b>	<b>10.5</b>	<b>2403 @ 35</b>
<b>Black Sidewall</b>												
	P205/55R15	87S	270-321	88561	6.0-8.0	23.9	6.6	8.4 on 6.5	10.9	870	11	1201 @ 35
<b>New 1Q</b>	<b>P195/50R16</b>	<b>83S</b>	<b>270-555</b>	<b>60277</b>	<b>5.0-7.5</b>	<b>23.7</b>	<b>6.3</b>	<b>7.9 on 6.0</b>	<b>10.9</b>	<b>878</b>	<b>11</b>	<b>1074 @ 35</b>
<b>New 1Q</b>	<b>P205/50R16</b>	<b>86S</b>	<b>270-222</b>	<b>89159</b>	<b>5.5-8.0</b>	<b>24.1</b>	<b>6.6</b>	<b>8.4 on 6.5</b>	<b>11.0</b>	<b>863</b>	<b>11</b>	<b>1168 @ 35</b>
	P205/55R16	89S	270-365	70523	6.0-8.0	24.9	6.6	8.4 on 6.5	11.4	835	11	1279 @ 35
<b>New 1Q</b>	<b>P225/50R16</b>	<b>91S</b>	<b>270-250</b>	<b>67125</b>	<b>6.0-9.0</b>	<b>24.9</b>	<b>7.2</b>	<b>9.2 on 7.0</b>	<b>11.3</b>	<b>835</b>	<b>11</b>	<b>1367 @ 35</b>
	P245/50R16	96S	270-803	53281	6.5-9.5	25.7	8.0	10.0 on 7.5	11.7	809	11	1576 @ 35
<b>New 1Q</b>	<b>P265/50R16</b>	<b>101S</b>	<b>270-229</b>	<b>66711</b>	<b>7.0-10.0</b>	<b>26.5</b>	<b>8.6</b>	<b>10.9 on 8.5</b>	<b>11.9</b>	<b>785</b>	<b>11</b>	<b>1797 @ 35</b>
<b>New 1Q</b>	<b>P295/50R16</b>	<b>107S</b>	<b>270-239</b>	<b>51487</b>	<b>8.0-11.0</b>	<b>27.6</b>	<b>9.5</b>	<b>12.2 on 9.5</b>	<b>12.3</b>	<b>754</b>	<b>11</b>	<b>2149 @ 35</b>

\*The dimensions shown are average values for tires measured on the specified measuring rim width. Individual tires may vary from data shown.

\*\*Section width varies approximately 0.2" (5mm) for every 0.5" change in rim width. ⚠ WARNING: Serious or fatal injury may result from improper mounting, from underinflation or overloading, or from tire damage due to abusive use. For proper mounting, see tire dealer. For proper operation, consult Tire Information Placard in vehicle. For high-speed driving, additional inflation pressure and possibly reduced tire loading and/or upsizing is required. In the absence of specific recommendations by the vehicle manufacturer, use the following guidelines based on those in the European Tyre and Rim Technical Organization Standards Manual.

For speeds over (100 mph) load and inflation MUST be adjusted according to the table below.

MAXIMUM SPEED mph	100	106	112
INFLATION INCREASE psi	0	1	2
LOAD CAPACITY (% of max)	100	100	100

Inflation pressure increase must not exceed the maximum pressure branded on the tire sidewall. When a consumer requests a replacement tire with a lower speed rating than the original equipment tire, you must clearly communicate to him or her that the handling of the vehicle may be different and that its maximum speed capability is limited to that of the lowest speed rated tire on the vehicle.

Exceeding the lawful speed limit is neither recommended nor endorsed. **New** New sizes and preliminary data subject to change. New size availability noted by Quarter, e.g. 1Q.