

Holden Vectra

Triple Info Display

Caution: Vehicle ignition must remain off when the instrument cluster is removed.

Instructions





<u>Contents</u>	<u>Page</u>
Triple Info Display Removal	2
Postage & Packaging	4
Payment Methods	4
Triple Info Display Installation	4
Repair Request Form	5

Tools Required


Flat blade screwdriver
Magnetic head medium Philips screwdriver
4 feeler gauges

Triple Info Display Removal

- 1) Turn the steering wheel to reveal the screw cover plugs. Remove these and the screw underneath. There are 2 for removal, one on either side of the steering wheel.
- 2) Remove the 3 screws securing the bottom half of the steering wheel shroud.
- 3) Ensure the ignition is off and remove the key. Open and close a door. Apply sticky tape over the ignition key entry.
- 4) Remove the top and bottom steering wheel shrouds.
- 5) Remove the wiper switch by releasing the top and bottom clips. Let it hang free. Repeat the same for the indicator switch.
- 6) Remove both the center vents and the vent on the driver's side by the following method described: *working one vent at a time insert each of the 4 feeler gauges down the sides of the vent to press and release the clips securing the vent in place. Remove the vent when the clips have released.*
- 7) Protect the sharp edges of the small screwdriver by applying sticky tape. Now carefully lever the light switch out from the dashboard and withdraw the switch assembly.
- 8) Remove the screws located inside the center vent. Remove the center vent surround.

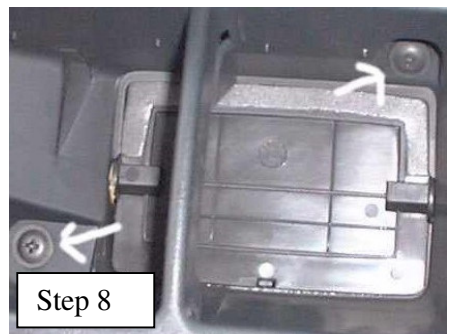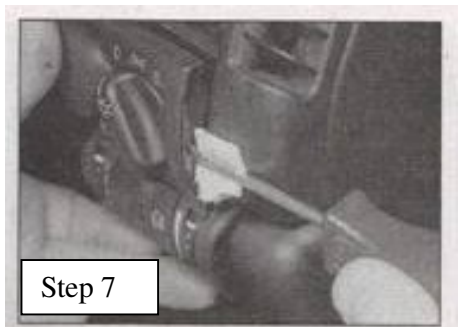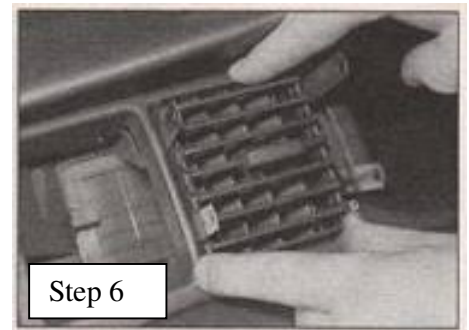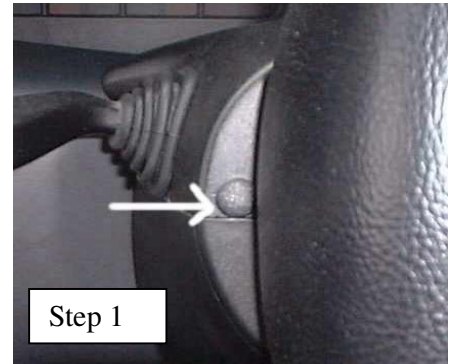


9) Remove the screws located inside the driver's side vent and light switch. Remove the surrounds of the driver's side vent. Remove the screw that secures the right hand side of the instrument cluster (revealed after removal of vent surround.)

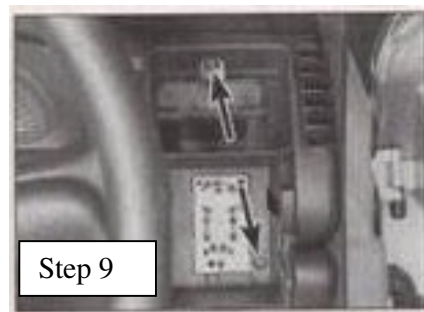

Step 9

10) Remove the screw (revealed after removal of center vent surround) that secures the left hand side of the instrument cluster.

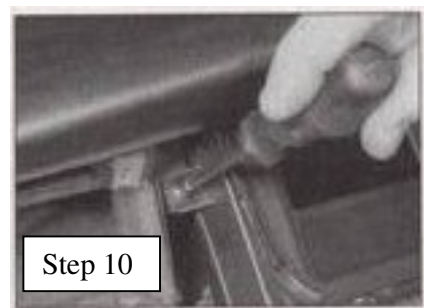


Step 10

11) Remove the two screws below the instrument cluster.

12) The instrument cluster together with the Triple Info Display can now be removed from the dashboard a short distance. Reach behind and lift the black clip to allow the removal of the yellow connector from the rear of the Triple Info Display. The whole instrument cluster can now be completely removed.

Remove the clock adjustment buttons and the 2 screws that secure the Triple Info Display to the main instrument cluster. The Triple Info Display will now be free and looks like the picture below.

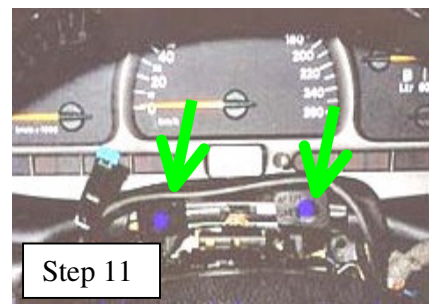

Step 11



Step 12

Warning: Vehicle ignition must remain off at all times when the instrument cluster is removed.

Postage & Packaging

Of highest importance is to use a rigid box that brings the combined weight under 1 Kg. Australia Post sells a suitable box with the code **BM**. Suitable wrap the unit in bubble wrap for protection during transport.

Post your TID complete with the filled in Repair Request Form to the following address:

Autotronic L.C.F.S. PTY LTD
1 Wendy Street
Moorabbin VIC 3189

PLEASE POST ON A MONDAY TO AVOID THE WEEKEND ON THE RETURN.

Once received TIDs are repaired and returned by post the 2nd business day.

Payment Methods

An invoice will be issued and sent to you with your repaired unit. Payment is accepted by Credit Card, Cheque, Money Order, Internet Banking or by visiting any Commonwealth Bank branch to make a direct deposit. The business Commonwealth Bank connections are as follows:

BSB (6 digits): 063 128
Account No: 10311612
Account Name: AUTOTRONIC L.C.F.S. PTY LTD

Triple Info Display Installation

Installation is the reverse of the procedure described on pages 2 and 3.

You must observe the following precaution at all times

Warning: Vehicle ignition must remain off when the instrument cluster is removed.

Repair Request Form

Customer Details

Name Date

Postal Address

State Postcode

Contact Phone Number (Home, after hours)

Contact Phone Number (Work, business hours)

Contact Phone Number (Mobile)

Parcel Post Method Regular (3-5 business days **one way**) Express (guaranteed next business day **one way**)


Vehicle Details

Year of Manufacture

Model

LCD Problem Areas

Please mark the areas or pixels that are currently defective on your display.

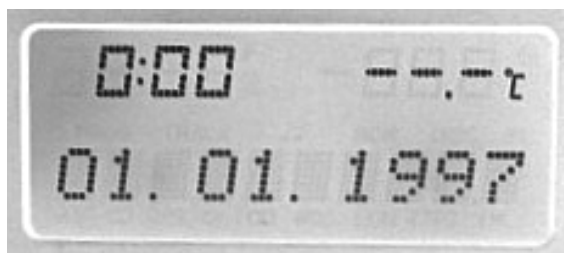

Please include and send this form together with your Triple Information Display

To

Autotronic L.C.F.S. PTY LTD`
 1 Wendy Street
 Moorabbin VIC 3189

Autotronic Liquid Crystal
Field Services Pty. Ltd. © 2005
 041 2299 034
<http://www.geocities.com/liquidxtal/>