

New Shear Actuated Smart Structure Beam Finite Element

A. Benjeddou*, M.A. Trindade† and R. Ohayon‡

Structural Mechanics and Coupled Systems Laboratory, Conservatoire National des Arts et Métiers, Paris, France.

ABSTRACT. This paper presents the formulation and validation of a new adaptive sandwich beam finite element, capable of dealing with either extension or shear actuation mechanisms. This is reached by coating an elastic core with piezoelectric sheets or sandwiching a piezoelectric core between two elastic faces. The poling direction is taken parallel to the transversely applied electric field for the first mechanism, and in the axial direction for the second one. The sandwich construction is made of unsymmetric thin faces (Euler-Bernoulli beams) and a relatively thick core (Timoshenko beam). The obtained two-node finite element has only four mechanical degrees of freedom which are the deflection and its derivative and the mean and relative axial displacements of the faces mid-planes. Finite element analysis of segmented and continuous cantilever adaptive sandwich beams with active faces (extension actuated) or core (shear actuated) show good comparisons with results found in the literature. Additional parametric studies (actuator's position and thickness, structure's stiffness) with the present element indicate that the shear actuation mechanism presents several promising features over the conventional extension actuation mechanism. In fact, the *shear actuation mechanism* is better than the *extension* one for stiff structures and thick piezoelectric actuators.

INTRODUCTION

Recent and current research efforts in the field of structural control using active materials, are directed towards improvements of the actuation capacity of these systems. Conventional monolithic piezoelectric actuators produce longitudinal stresses or strains through their stress-induced e_{31} or strain-induced d_{31} piezoelectric constants. Their models are based on, *a priori* assumptions of through-thickness constant applied electric field and uniform poling, and in-plane constant stress or strain behavior. Using Interdigitated Electrodes (IDE), transverse actuation, through e_{33} or d_{33} piezoelectric constant can also be introduced.¹ However, a complex poling pattern results in the actuator due to an induced in-plane component of electric field. This must be accounted for any model.

By sandwiching a PZT layer between off-axis laminae the composite laminate can produce twisting deformation,^{2,3} through transformed piezoelectric constants $\tilde{e}_{36}$ or $\tilde{d}_{36}$, but this twisting is secondary since it is caused by the extension-twisting coupling. This can also be achieved through special piezoelectric attachment techniques, electrode designs,⁴ or Piezoelectric Fiber Composites (PFC) with⁵ or without¹ Interdigitated Electrodes (IDEPFC).

All above advanced techniques are based basically on the extension actuation mechanism of the piezoelectric materials because the electric field and poling vectors are always parallel and the inherent shear effects of the material are always neglected. Hence, the e_{15} or d_{15} piezoelectric constants are not used by the above advanced actuators. To be used, these require constant electric fields but perpendicular to the poling vector. Although mentioned early in the nineteenth,⁶ shear-based actuators were proposed only recently, through a preliminary study with a commercial finite element analysis code⁷ and a theoretical model.⁸ A finite element model was also proposed by Benjeddou *et al.*,⁹⁻¹¹ and used to compare both extension and shear actuation mechanisms.¹² These theoretical and numerical models used the stress-induced piezoelectric coupling constant e_{15} of axially poled PZT layer or patch sandwiched between thin elastic layers. d_{15} -based torsional actuators were also proposed recently for the production of large angular displacement and torque.¹³ Actuator designs and assembly methods, materials preparation, poling procedures, test results for joint strengths, and actuator output capabilities are discussed. This report pointed out that the current commercially available PZT piezoceramics are not optimized for their shear piezoelectric response, and that most of the current PZT piezoceramics are optimized for their extension piezoelectric properties.

It is the objective of the present paper to present a new adaptive sandwich beam finite element capable of dealing with either extension or shear actuation mechanisms. New mechanical model is proposed to avoid shear locking

*Research Assistant Professor, Member AIAA.

†Doctoral student.

‡Professor, Member ASME.

present in the previous element.⁹⁻¹¹ This model is based on the use of mean and relative axial displacements of the mid-planes of the faces, instead of those of the upper and lower skins of the core used in the previous element. An extra-shear strain due to the faces sliding against the core is then induced and all quantities are expressed in terms of the faces displacements. In the following sections, theoretical and finite element models are presented, then validated through static and free-vibration analysis of various cantilevered adaptive beam configurations. Results are compared to those numerical and analytic found in the literature. Conclusions and prospects are then formulated at the end of the paper.

THEORETICAL MODEL

Consider a sandwich beam made of either piezoelectric surface layers and elastic core, or piezoelectric core and elastic surface layers. In the first configuration the surface layers are poled transversely, whereas in the second one, the core is axially poled. For both cases, a through-thickness electric field is applied to each piezoelectric layer. However, elastic layers are assumed insulated. All layers are assumed perfectly bonded and in xz plane deformation state. Bernoulli-Euler theory is retained for the sandwich beam surface layers, while the core is assumed to behave as Timoshenko beam. A local frame is attached to each layer at its left end center, whereas the global one is located at the left end center of the whole beam, so that beam centroidal and elastic axes coincide with the x -axis. The length, width and thickness of the beam are denoted by L , b and h , respectively. A , B , C indices indicate top, bottom and core layer quantities and F index is used for surface layer parameters.

MECHANICAL DISPLACEMENTS

Starting with linear axial displacements for each layer and enforcing the interface displacement continuities leads to the following expressions for the axial displacements for the faces and the core, respectively,

$$\begin{aligned} u_i &= \left(\bar{u} \pm \frac{\tilde{u}}{2} \right) - (z - z_i)w' , \quad i = A(+), B(-) \\ u_C &= (\bar{u} + dw') + z \left(\frac{\tilde{u}}{h_C} + \lambda w' \right) ; \quad d = \frac{h_A - h_B}{4} ; \quad \lambda = \frac{h_A + h_B}{2h_C} \end{aligned} \quad (1)$$

w' is the first derivative of the transverse deflection (constant through-thickness). $\bar{u}$ and $\tilde{u}$ are the mean and relative axial displacements of the upper and lower sandwich beam faces, defined by,

$$\bar{u} = \frac{\bar{u}_A + \bar{u}_B}{2} ; \quad \tilde{u} = \bar{u}_A - \bar{u}_B \quad (2)$$

where, $\bar{u}_A$ and $\bar{u}_B$ are mid-plane displacements of the upper and lower surface layers.

The geometrical parameter d couples the bending behavior of the surface layers to the membrane behavior of the core. It vanishes for symmetrical sandwich construction. However, the mechanical parameter λ , coupling the bending behavior of the surface layers to that of the core, is intrinsic since it does not vanish even for symmetrical construction. It is an important variable for parameter studies.

REDUCED CONSTITUTIVE EQUATIONS

A linear orthotropic piezoelectric material with material symmetry axes parallel to the beam axes is considered for piezoelectric layers. c_{ij} , e_{kj} and ϵ_k ($i, j = 1, \dots, 6; k = 1, 2, 3$) denote its elastic, piezoelectric and dielectric constants.

For *extension actuation mechanism*, the piezoelectric beam surface layers are poled in parallel to the through-thickness applied electric field. Using the above mechanical assumptions, the three-dimensional linear constitutive equations of an orthotropic piezoelectric layer can be reduced^{9,11} to

$$\begin{Bmatrix} \sigma_1 \\ D_3 \end{Bmatrix} = \begin{bmatrix} c_{11}^* & -e_{31}^* \\ e_{31}^* & \epsilon_3^* \end{bmatrix} \begin{Bmatrix} \epsilon_1 \\ E_3 \end{Bmatrix} ; \quad c_{11}^* = c_{11} - \frac{c_{13}^2}{c_{33}} ; e_{31}^* = e_{31} - \frac{c_{13}}{c_{33}} e_{33} ; \epsilon_3^* = \epsilon_3 + \frac{e_{33}^2}{c_{33}} \quad (3)$$

σ_1 , ϵ_1 , D_3 and E_3 are axial stress and strain, and transverse electric displacement and field. Notice that the electromechanical coupling is between axial strain and transverse electric field only. This is the basic foundation of the extension actuation mechanism.

For the *shear actuation mechanism*, the piezoelectric core layer is poled in the axial direction, i.e., perpendicular to the applied transverse electric field. Applying coordinate transformations^{1,3} so that axial and transverse indices interchange and using above mechanical assumptions, the three-dimensional linear constitutive equations of the orthotropic piezoelectric core reduce to,^{9,11}

$$\begin{Bmatrix} \sigma_1 \\ \sigma_5 \\ D_3 \end{Bmatrix} = \begin{bmatrix} c_{33}^* & 0 & 0 \\ 0 & c_{55} & -e_{15} \\ 0 & e_{15} & \epsilon_1 \end{bmatrix} \begin{Bmatrix} \epsilon_1 \\ \epsilon_5 \\ E_3 \end{Bmatrix} ; c_{33}^* = c_{33} - \frac{c_{13}^2}{c_{11}} \quad (4)$$

σ_5 and ϵ_5 are transverse shear stress and strain. Notice also that the electromechanical coupling is between shear strain and transverse electric field only. This is the origin of the newly defined concept of *shear actuation mechanism*.

ELECTRIC POTENTIALS

Electric potential patterns in each piezoelectric layer for each actuation mechanism are obtained through combination of equations (1) and (2) and the corresponding reduced constitutive equations (3) or (4), then integration of the electrostatic equilibrium equation ignoring free volumic charge density.

For the *extension actuation mechanism*, integration of the reduced electrostatic equilibrium equation,

$$D_{i3,3} = 0; i = A, B \quad (5)$$

leads to the following electric potentials in the faces,

$$\varphi_i = \bar{\varphi}_i + (z - z_i) \frac{\tilde{\varphi}_i}{h_i} + \left(1 - \frac{4(z - z_i)^2}{h_i^2} \right) \frac{h_i^2}{8} \frac{e_{31}^{i*}}{\epsilon_3^{i*}} w'' ; \tilde{\varphi}_i = \varphi_i^+ - \varphi_i^- ; \bar{\varphi}_i = \frac{\varphi_i^+ + \varphi_i^-}{2} \quad (6)$$

φ_i^+ and φ_i^- are subscribed electric potentials on upper and lower skins of the i -th surface layer. Notice that the electric potential is found to be the sum of a linear part, known from the applied uniform potentials $\varphi_i^\pm$, and a quadratic part, proportional to the beam curvature. This is also true for thin piezoelectric plates,¹⁴ and represents the induced potential, often neglected in the literature.

For *shear actuation mechanism*, $D_{C1,1}$ is neglected compared to $D_{C3,3}$ so that equation (5) still holds for the core. Its integration provides a linear potential in the core,

$$\varphi_C = \bar{\varphi}_C + z \frac{\tilde{\varphi}_C}{h_C} \quad (7)$$

where $\bar{\varphi}_C$ and $\tilde{\varphi}_C$ are mean and relative potentials of the piezoelectric core.

VARIATIONAL FORMULATION

The variational formulation of the adaptive piezoelectric sandwich beam can be expressed as,

$$\delta T - \delta H + \delta W = 0 ; \forall \delta \bar{u}, \delta \tilde{u}, \delta w, \delta \tilde{\varphi} \quad (8)$$

where δT , δH and δW are the virtual variations of kinetic energy, electromechanical energy and work done by applied mechanical loads, respectively. Each of these quantities can be expressed in terms of the main variables, namely, $\bar{u}$, $\tilde{u}$, w , for an actuation problem. However for a sensing problem, $\tilde{\varphi}$ should be retained as main variable.

Starting from the electromechanical energy of a piezoelectric media, using constitutive equations (3,4), strain-displacements and electric field-potential relations, and integrating through thickness of the sandwiched beam, leads to the following expression of δH ,

$$\delta H = \delta H_F + \delta H_C \quad (9)$$

where δH_F and δH_C are variations of the electromechanical energy corresponding to the surface layers and core layer, respectively. These are in turn decomposed into mechanical, piezoelectrical and dielectrical contributions. Hence δH_F takes the form,

$$\delta H_F = \delta \bar{H}_{Fm} + \delta H_{Fme} + \delta H_{Fem} + \delta H_{Fe} \quad (10)$$

where,

$$\begin{aligned}
\delta \bar{H}_{Fm} &= \int_0^L \left\{ \left[(c_{11}^{A*} A_A + c_{11}^{B*} A_B) \bar{u}' + (c_{11}^{A*} A_A - c_{11}^{B*} A_B) \frac{\bar{u}'}{2} \right] \delta \bar{u}' + \left[(c_{11}^{A*} A_A - c_{11}^{B*} A_B) \bar{u}' + \right. \right. \\
&\quad \left. \left. + (c_{11}^{A*} A_A + c_{11}^{B*} A_B) \frac{\bar{u}'}{2} \right] \frac{\delta \bar{u}'}{2} + (\bar{c}_{11}^A I_A + \bar{c}_{11}^B I_B) w'' \delta w'' \right\} dx \\
\delta H_{Fme} &= \int_0^L \left[\left(e_{31}^{A*} A_A \frac{\tilde{\Phi}_A}{h_A} + e_{31}^{B*} A_B \frac{\tilde{\Phi}_B}{h_B} \right) \delta \bar{u}' + \left(e_{31}^{A*} A_A \frac{\tilde{\Phi}_A}{h_A} - e_{31}^{B*} A_B \frac{\tilde{\Phi}_B}{h_B} \right) \frac{\delta \bar{u}'}{2} \right] dx \\
\delta H_{Fem} &= \int_0^L \left[\left(e_{31}^{A*} A_A \frac{\delta \tilde{\Phi}_A}{h_A} + e_{31}^{B*} A_B \frac{\delta \tilde{\Phi}_B}{h_B} \right) \bar{u}' + \left(e_{31}^{A*} A_A \frac{\delta \tilde{\Phi}_A}{h_A} - e_{31}^{B*} A_B \frac{\delta \tilde{\Phi}_B}{h_B} \right) \frac{\bar{u}'}{2} \right] dx \\
\delta H_{Fe} &= \int_0^L \left(e_3^{A*} A_A \frac{\tilde{\Phi}_A}{h_A} \frac{\delta \tilde{\Phi}_A}{h_A} + e_3^{B*} A_B \frac{\tilde{\Phi}_B}{h_B} \frac{\delta \tilde{\Phi}_B}{h_B} \right) dx ; \bar{c}_{11}^i = c_{11}^{i*} + \frac{(e_{31}^{i*})^2}{\epsilon_3^{i*}}, i = A, B
\end{aligned}$$

The core's contribution to the electromechanical energy variation of the sandwich beam can be written as,

$$\delta H_C = \delta H_{Cm} + \delta H_{Cme} + \delta H_{Cem} + \delta H_{Ce} \quad (11)$$

where,

$$\begin{aligned}
\delta H_{Cm} &= \int_0^L \left\{ c_{33}^{C*} A_C (\bar{u}' + d w'') (\delta \bar{u}' + d \delta w'') + c_{33}^{C*} I_C \left(\frac{\bar{u}'}{h_C} + \lambda w'' \right) \left(\frac{\delta \bar{u}'}{h_C} + \lambda \delta w'' \right) + \right. \\
&\quad \left. + c_{55}^C A_C \left(\frac{\tilde{u}}{h_C} + (\lambda + 1) w' \right) \left(\frac{\delta \tilde{u}}{h_C} + (\lambda + 1) \delta w' \right) \right\} dx \\
\delta H_{Cme} &= \int_0^L e_{15}^C A_C \frac{\tilde{\Phi}_C}{h_C} \left[\frac{\delta \tilde{u}}{h_C} + (\lambda + 1) \delta w' \right] dx \\
\delta H_{Cem} &= \int_0^L e_{15}^C A_C \left[\frac{\tilde{u}}{h_C} + (\lambda + 1) w' \right] \frac{\delta \tilde{\Phi}_C}{h_C} dx ; \delta H_{Ce} = \int_0^L \epsilon_1^C A_C \frac{\tilde{\Phi}_C}{h_C} \frac{\delta \tilde{\Phi}_C}{h_C} dx
\end{aligned}$$

where $I_i, A_i, i = A, B, C$ are moment area and area of the i -th layer. Notice that the piezoelectric material has a passive effect on piezoelectric layers through augmentation of their bending stiffness $\bar{c}_{11}^{i*}$, due to the induced potential effect.

For actuation problems, $\tilde{\Phi}_i$ are known (prescribed); hence their virtual variations $\delta \tilde{\Phi}_i$ vanish. Consequently, δH_{em} and δH_e of (10,11) also vanish. Beside, for the extension actuation mechanism, δH_{Cme} also vanish since the core is elastic and the variational equation (8) reduces for $\delta W = 0$, to,

$$\delta \bar{H}_{Fm} + \delta H_{Cm} - \delta T = -\delta H_{Fme} \quad (12)$$

Similarly, the shear actuation problem is obtained from (8) by,

$$\delta H_{Fm} + \delta H_{Cm} - \delta T = -\delta H_{Cme} \quad (13)$$

where δH_{Fm} is similar to $\delta \bar{H}_{Fm}$ but with $\bar{c}_{11}^i = c_{11}^{i*}$.

From equations (10,11), δH_{me} terms in (12,13) can be interpreted as works of initial electric stresses. They can also be seen as works of actuation forces and moments. Hence, δH_{Cme} can be interpreted as an actuation distributed sliding shear moment $e_{15}^C A_C \frac{\tilde{\Phi}_C}{h_C}$ induced by the applied electric potential $\tilde{\Phi}_C$ to the core layer. The conjugate displacement parameter is the sliding shear angle $\frac{\tilde{u}}{h_C} + (\lambda + 1) w'$. Interpretation of δH_{Fme} can be seen better in the practical case of identical surface layers. In this case,

$$\delta H_{Fme} = \int_0^L \left[e_{31}^{F*} A_F \frac{\tilde{\Phi}_A + \tilde{\Phi}_B}{h_F} \delta \bar{u}' + e_{31}^{F*} A_F \frac{\tilde{\Phi}_A - \tilde{\Phi}_B}{h_F} \frac{\delta \bar{u}'}{2} \right] dx \quad (14)$$

Depending on the imposed potentials on the faces, two particular cases could be considered,

a) $\tilde{\Phi}_A = \tilde{\Phi}_B = \tilde{\Phi}_F$, for which δH_{Fme} reduces to,

$$\delta \bar{H}_{Fme} = 2 \int_0^L e_{31}^{F*} A_F \frac{\tilde{\Phi}_F}{h_F} \delta \bar{u}' dx \quad (15)$$

For homogeneous material properties in axial direction and uniform applied potentials, (15) becomes,

$$\delta\bar{H}_{Fme} = 2e_{31}^{F*}A_F \frac{\tilde{\Phi}_F}{h_F} \delta\bar{u}(L) - 2e_{31}^{F*}A_F \frac{\tilde{\Phi}_F}{h_F} \delta\bar{u}(0) \quad (16)$$

In this form, $\delta\bar{H}_{Fme}$ is interpreted as virtual work of boundary actuation tractions $2e_{31}^{F*}A_F \frac{\tilde{\Phi}_F}{h_F}$ induced by the applied identical potentials on the surface layers. Only axial mean displacement or strain is produced.

b) $\tilde{\Phi}_A = -\tilde{\Phi}_B = \tilde{\Phi}_F$, here, δH_{Fme} reduces to,

$$\delta\tilde{H}_{Fme} = \int_0^L e_{31}^{F*}A_F \frac{\tilde{\Phi}_F}{h_F} \delta\tilde{u}' dx \quad (17)$$

Again, this expression is integrated to obtain,

$$\delta\tilde{H}_{Fme} = e_{31}^{F*}A_F \frac{\tilde{\Phi}_F}{h_F} \delta\tilde{u}(L) - e_{31}^{F*}A_F \frac{\tilde{\Phi}_F}{h_F} \delta\tilde{u}(0) \quad (18)$$

$\delta\tilde{H}_{Fme}$ is interpreted as virtual work of boundary actuation tractions $e_{31}^{F*}A_F \frac{\tilde{\Phi}_F}{h_F}$ induced by the applied identical but opposite potentials on the surface layers. Only axial relative displacement or strain of the surface layers is produced.

Comparing expressions of δH_{Cme} given in (11) to those of $\delta\bar{H}_{Fme}$ (16) and $\delta\tilde{H}_{Fme}$ (18), an important feature can be noticed. That is, the extension actuation mechanism produces boundary forces (tractions/compressions), whereas the shear actuation mechanism induces distributed moments. It is then guessed that the latter avoids the common singularity problems at the boundary of conventional extension actuators.

Variation of the kinetic energy of the sandwich beam is the same for both mechanisms and can be written in terms of the main variables as,

$$\begin{aligned} \delta T = \int_0^L \left\{ \left[(\rho_A A_A + \rho_B A_B + \rho_C A_C) \ddot{u} + (\rho_A A_A - \rho_B A_B) \frac{\ddot{u}}{2} + \rho_C A_C d \ddot{w}' \right] \delta \bar{u} + [(\rho_A A_A - \rho_B A_B) \ddot{u} + (\rho_A A_A + \right. \\ \left. + \rho_B A_B + 4\rho_C \frac{I_C}{h_C^2}) \frac{\ddot{u}}{2} + \rho_C \frac{I_C}{h_C} \lambda \ddot{w}' \right] \frac{\delta \tilde{u}}{2} + (\rho_A A_A + \rho_B A_B + \rho_C A_C) \ddot{w} \delta w + \left[\rho_C A_C d \ddot{u} + \rho_C I_C \lambda \frac{\ddot{u}}{h_C} + \right. \\ \left. + (\rho_A I_A + \rho_B I_B + \rho_C A_C d^2 + \rho_C I_C \lambda^2) \ddot{w}' \right] \delta w' \} dx \end{aligned} \quad (19)$$

where ρ_i is the mass density of the i -th layer.

FINITE ELEMENT DISCRETIZATION

Since $\bar{u}$ and $\tilde{u}$ are C^0 -continuous and w is C^1 -continuous, they are interpolated by Lagrange linear and Hermite cubic shape functions, respectively. Classical finite element procedure is followed to discretize actuator variational problems (12,13). Hence, discretized shear actuation variational problem is,

$$M\ddot{q} + (K_F + K_C)q = -F_{Ce} \quad (20)$$

where $q = [\bar{u}_1, \tilde{u}_1, w_1, w'_1, \bar{u}_2, \tilde{u}_2, w_2, w'_2]$ is the degrees of freedom vector. M is the mass matrix of the sandwich beam obtained from the discretization of (19). K_F and K_C are the surface layers and core stiffness matrices obtained from the discretization of δH_{Fm} (with $\bar{c}_{11}^i = c_{11}^{i*}$) and δH_{Cm} given in (10) and (11), respectively. F_{Ce} is the induced electric load vector deduced from discretization of δH_{Cme} given in (11).

Discretization of the variational problem (12), leads to the following linear system,

$$M\ddot{q} + (\bar{K}_F + K_C)q = -F_{Fe} \quad (21)$$

where $\bar{K}_F$ is the stiffness matrix of the piezoelectric surface layers and F_{Fe} is the induced electric force vector obtained from the discretization of δH_{Fme} (10).

Mass and stiffness matrices, and mechanical and induced electric load vectors were integrated exactly (i.e., analytically). The present finite element model was implemented on MATLAB software. Good results have been obtained even for thin cores, indicating that the present element is shear locking free.

ANALYTIC AND NUMERICAL VALIDATION

A sandwich beam finite element capable of treating both *shear* and *extension actuation mechanisms*, was implemented. In order to validate it, comparisons between present element results and analytical and numerical results found in the literature, were made. Analytical and numerical results for static actuation of continuous⁸ and segmented⁷ configurations of cantilever beams were presented by Sun and Zhang.^{7,8} Modal analysis of segmented configuration of cantilever beams were presented by Lin *et al.*¹⁵ For all cases, in the *extension actuation mechanism*, top and bottom layers are supposed to be PZT5H piezoelectric material and the central core to be Aluminium. Whereas, for the *shear actuation mechanism*, top and bottom layers are assumed to be Aluminium and the central core to be composed of a small patch of PZT5H piezoelectric material and, covering the rest of the core, a rigid foam material.

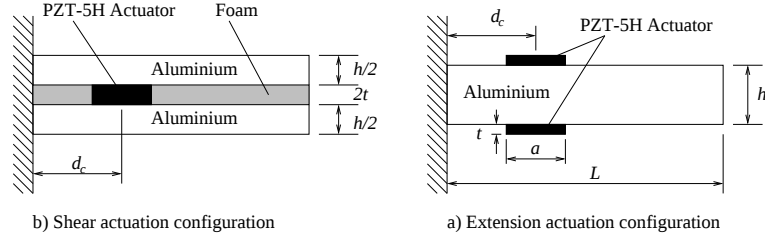


Figure 1: Segmented configurations of cantilever sandwich beam for shear and extension actuation mechanisms.

STATIC ANALYSIS

The segmented geometric configurations of both actuation mechanisms are presented in figure 1 with $L = 100$ mm, $h = 16$ mm and $t = 1$ mm. Length and position of actuator are $a = 10$ mm and $d_c = 15$ mm, unless stated differently. Beams are clamped at $x = 0$ and free at $x = L$. In order to bend the beam, voltages are applied at top and bottom surfaces of piezoelectric layers, inducing bending electric forces. Material data are those given by Sun and Zhang.^{7,8} For the *shear actuation mechanism*, voltage applied to the piezoelectric core has a value of $\tilde{\phi}_C = 20$ V, and for the *extension actuation mechanism*, voltages applied to surface actuators are $\tilde{\phi}_F = 10$ V.

As a first analysis, the deflection of both beams for the continuous case, that is, with actuators having the beam's length, was evaluated and compared to analytical results of Zhang and Sun,⁸ in order to examine the convergence of the present element. In this case, for the *shear actuation mechanism*, there is no rigid foam since the piezoelectric actuator occupies all the core layer.

For both mechanisms, the deformation of the continuous actuated cantilever beam was computed by only four finite elements. Comparisons of these results to the analytical solution⁸ are represented in figures 2 and 3, indicating that finite element results for the deflection of the shear and extension actuated beam match very well with the theoretical solution.⁸

The convergence of the element to the reference tip's displacement⁸ is shown in figure 4 for the shear actuation mechanism. For the extension actuation mechanism, the finite element produced errors of less than 0.05% for the beam's deflection. It is clear that the present element is very precise even with low number of elements (less than 2% for 2 elements). Beside, it converges monotonically and rapidly to the desired tip's deflection.

As a second analysis, actuator's position is set to vary. In each case, shear actuated beam's tip displacement induced by applied electric forces is evaluated. Actuator's length is fixed at $a = 10$ mm and actuator's position is set to vary in the range $[10, 90]$ mm. Results shown in figure 5 indicate that present finite element results show very good agreement with finite element results presented by Sun and Zhang,⁷ using a commercial finite element code. As expected, the actuator is more effective when close to the fixed end.

As piezoelectric actuation is applied, in practice, to different kinds of structures, it is worthwhile to investigate the effect of structure's stiffness on the performance of the actuator. Therefore, an analysis of this effect was achieved by evaluation of beam's tip displacement through piezoelectric actuation for several structure's stiffness ratios (Figure 6). These are defined as c_{11}^*/c_{33}^* for the shear actuation mechanism and c_{33}^*/c_{11}^* for the extension actuation mechanism. As it can be seen in figure 6, surface-mounted actuator is more efficient when its stiffness is greater than structure's one. Nevertheless, although sandwich actuators are not so efficient in this case, they preserve their effectiveness in all the range, specially in the most common structure/actuator stiffness ratio range between 1 and 10. This is a great

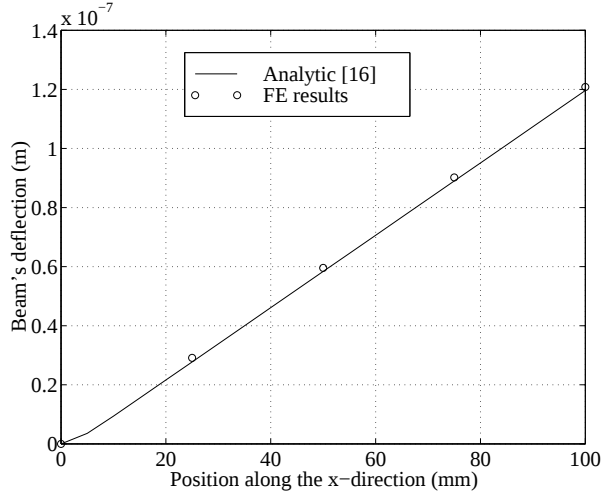


Figure 2: Beam's deflection for shear actuation mechanism.

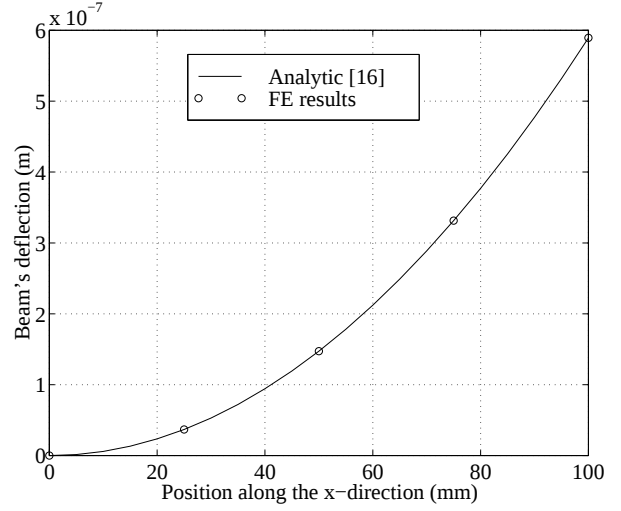


Figure 3: Beam's deflection for extension actuation mechanism.

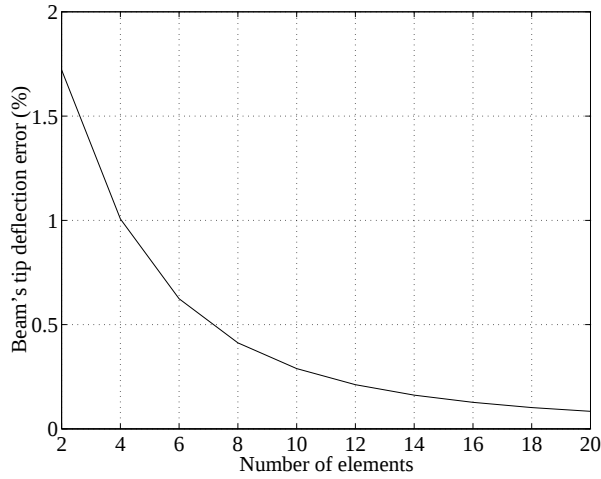


Figure 4: Convergence of beam's tip deflection for the shear actuation mechanism.

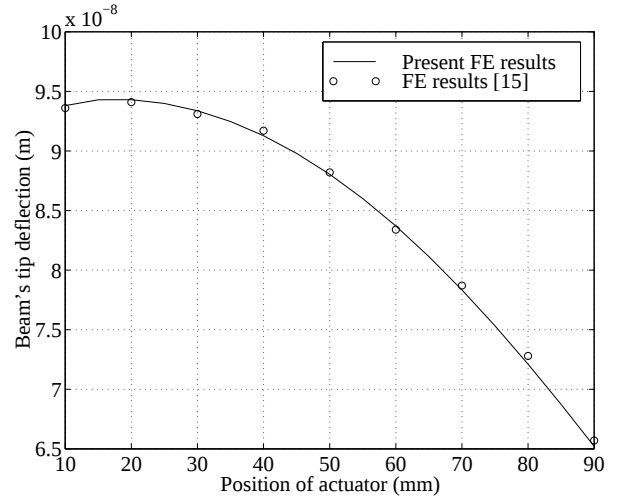


Figure 5: Variation of beam's tip deflection with the position of actuator.

advantage for the *shear actuation mechanism* since, in the contrary of *extension* one, its performance is preserved for stiffer structures. Figure 6 shows also that there is an optimal stiffness ratio range for which the shear actuation mechanism is always better than the extension one. This is the case for PZT5H and faces' stiffer material.

The variation of beam's tip deflection with the actuator's thickness was also evaluated. It can be seen in figure 7 that the *shear actuation mechanism* is more performant than *extension* one for thicker actuators, as can be expected. Therefore, for the case presented, the *extension actuation mechanism* is more efficient in a low range ($t < 2$ mm), whereas, as noticed from figure 7, for $t > 2$ mm, the shear actuation mechanism tends to be more efficient than the extension one.

FREE-VIBRATION ANALYSIS

Natural modes and frequencies were evaluated for both *shear* and *extension actuation mechanisms*. Material data are the same as presented by Lin *et al.*¹⁵ and geometric parameters are $L = 50$ mm, $h = 2$ mm, $t = 0.5$ mm, $d_c = 11$ mm and $a = 20$ mm. The first five natural frequencies are given in table 1 for both actuation mechanisms. It is clear, from table 1, that the natural frequencies of the shear actuated beam are lower than those of the extension actuated

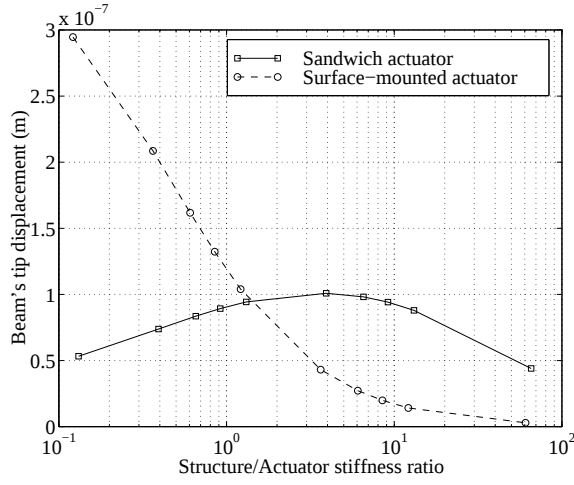


Figure 6: Variation of beam's tip deflection with structure/actuator stiffness ratio.

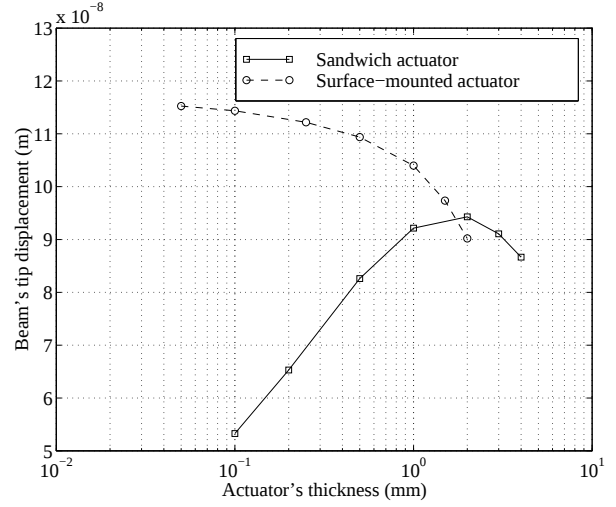


Figure 7: Variation of beam's tip deflection with actuator thickness.

one. This can be explained by the fact that the sandwich configuration is less rigid than the extension configuration because of the presence of the foam in the core. This difference increases with frequency because the foam becomes more deformed (Figure 8). It can be seen that in all three bending modes, actuator's deformation is lower for the *shear actuation mechanism*. Analytic frequencies were given only for the extension actuation mechanism because there were not any in the literature for the shear actuation mechanism. Our values for the latter mechanism are given in table 1 for future reference.

	1	2	3	4	5
Shear actuation mechanism	985	3912	8305	17273	25980
Extension actuation mechanism	1084	4787	12422	24547	38599
Analytical results ¹⁵	1030	4230	12000	23500	38500

Table 1: First five natural bending frequencies (Hz) for shear (SAM) and extension (EAM) actuated cantilever beam.

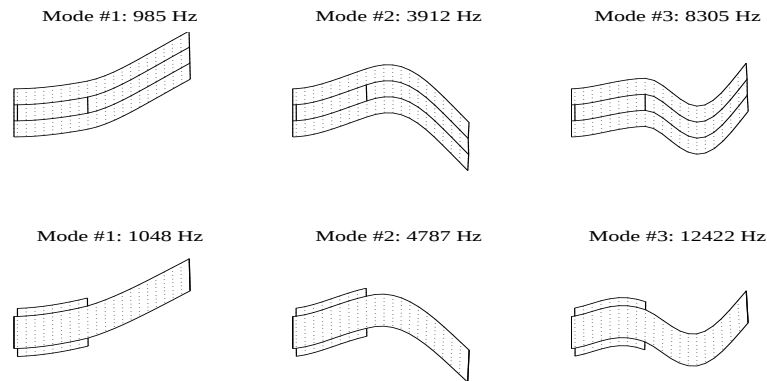


Figure 8: Bending vibration modes for shear and extension actuation mechanisms.

CONCLUSIONS

A theoretical formulation and finite element implementation of a new adaptive unsymmetric sandwich beam model were presented and validated, for both *extension* and *shear actuation mechanisms*. Mechanically, the model is based

on Bernoulli-Euler assumptions in the faces and Timoshenko hypotheses in the core. Rotatory inertia effects were considered for all layers. Electrically, the electric potential was found to be quadratic for *extension actuation mechanism* (piezoelectric faces) and linear for *shear actuation mechanism* (piezoelectric core). Besides, the sandwich beam was supposed to be short circuited, i.e., electric potentials were imposed on upper and lower faces of piezoelectric layers and natural boundary conditions (free-charge) were assumed on the remaining lateral boundaries.

A first adaptive sandwich beam model was developed in previous works.^{9,11} Due to the presence of shear locking problems in this element, a second model with a different kinematics description was developed here. This second adaptive sandwich beam model, taking into account the extra-shear due to the sliding of the faces against the core, also allowed to better understand energy-dissipation capacity of the beam.

Theoretical and numerical comparisons of *shear* and *extension actuation mechanisms* for statics and vibration of smart beams were presented. Present results matched better with analytical results than the results of the previous element, showing better convergence characteristics. Thanks to the new kinematics description, the new adaptive beam element did not present shear locking problems. It was shown that surface-mounted actuators, acting through the e_{31} piezoelectric constant, induce boundary concentrated forces and moments in the structure. Whereas, sandwich shear actuators, acting through the e_{15} piezoelectric constant, induce distributed moments in the structure. Therefore, we can expect less problems of actuators' debonding at its extremities for *shear actuation mechanism*.

Comparisons between both actuation mechanisms in static piezoelectric actuation showed that only thin extension actuators are efficient. Shear actuators, in the contrary, are more effective for a medium thickness range. It was also shown that shear actuators' performance is less dependent on structure's stiffness. Moreover, for rigid structures, *shear actuation mechanism* presents better performance than *extension* one.

Vibration analysis of both actuation mechanisms was presented, through evaluation of natural bending frequencies and modes. Vibration modes are equivalent in both mechanisms; nevertheless shear actuators are less deformed than extension ones and natural frequencies are higher for the extension actuation mechanism.

The present work is being extended to implement the sensing capacity of the adaptive sandwich beam in order to study active control applications.

REFERENCES

- [1] Hagood, N.W., Kindel, R., Ghandi, K. and Gaudenzi, P. Transverse Actuation of Piezoceramics Using Interdigitated Surface Electrodes, *North American Conference on Smart Structures and Materials*, vol.1917, Society of Photo-Optical Instrumentation Engineers, Albuquerque, NM, 1993, pp.341–352 (SPIE Paper 1917-25).
- [2] Aldraihem, O.J. and Wetherhold, R.C. Mechanics and Control of Coupled Bending and Twisting Vibration of Laminated Beams, *Smart Materials and Structures* 6(2), 1997, pp.123–133.
- [3] Bent, A.A., Hagood, N.W. and Rodgers, J.P. Anisotropic Actuation with Piezoelectric Fiber Composites, *Journal of Intelligent Materials Systems and Structures* 6(3), 1995, pp.338–349.
- [4] Han, T.-H. and Lee, I. Active Damping Enhancement of Composite Plates with Electrode Design Piezoelectric Materials, *Journal of Intelligent Materials Systems and Structures* 8(3), 1997, pp.249–259.
- [5] Bent, A.A. and Hagood, N.W. Piezoelectric Fiber Composites with Interdigitated Electrodes, *Journal of Intelligent Materials Systems and Structures* 8(11), 1997, pp.903–919.
- [6] Soong, T.T. and Hanson, R.D. Recent Development in Active and Hybrid Control Research, *1st International Workshop on Structural Control*, edited by G.W. Housner and S.F. Masri, Univ. of Southern California, Los Angeles, CA, 1993, pp.483–490 (Paper 46).
- [7] Sun, C.T. and Zhang, X.D. Use of Thickness Shear Mode in Adaptive Sandwich Structures, *Smart Materials and Structures* 4(3), 1995, pp.202–206.
- [8] Zhang, X.D. and Sun, C.T. Formulation of an Adaptive Sandwich Beam, *Smart Materials and Structures* 5(6), 1996, pp.814–823.
- [9] Benjeddou, A., Trindade, M.A. and Ohayon, R. A Finite Element Model for Extension and Shear Piezoelectrically Actuated Adaptive Structures, *Japan–France Seminar on Intelligent Materials and Structures*, Tohoku Univ., Sendai, Japan, 1997, pp.277–295.
- [10] Benjeddou, A., Trindade, M.A. and Ohayon, R. A Finite Element Model for Shear Actuated Adaptive Structures, *8th International Conference on Adaptive Structures and Technologies*, edited by Y. Murotsu, C.A. Rogers, P. Santini and H. Okubo, Technomic, Lancaster, PA, 1997, pp.133–142.
- [11] Benjeddou, A., Trindade, M.A. and Ohayon, R. A Unified Beam Finite Element Model for Extension and Shear Piezoelectric Actuation Mechanisms, *Journal of Intelligent Materials Systems and Structures* 8(12), 1997, pp.1012–1025.
- [12] Benjeddou, A., Trindade, M.A. and Ohayon, R. Comparison of Extension and Shear Actuation Mechanisms for Smart Structure Beams, *4th European Conference on Smart Structures and Materials*, edited by G.R. Tomlinson and W.A. Bullough, Inst. of Physics, Bristol, England, UK, 1998, pp.131–138.
- [13] Kim, G., Jensen, T., DeGiorgi, V., Bender, B., Wu, C.C., Flipen, D., Lewis, D., Zhang, Q., Mueller, V., Kahn, M., Silberglett, R. and Len, L.K. Composite Piezoelectric Assemblies for Torsional Actuators, *U.S. Naval Research Lab. and Penn State Univ., Rept. NRL/MR/6380-97-7997*, Washington, DC, Sept. 1997.

- [14] Rahmoune, M., Osmont, D., Benjeddou, A. and Ohayon, R. Finite Element Modeling of a Smart Structure Plate System, *7th International Conference on Adaptive Structures and Technologies*, edited by P. Santini, C.A. Rogers and Y. Murotsu, Technomic, Lancaster, PA, 1996, pp.463–473.
- [15] Lin, M.W., Abatan, A.O. and Rogers, C.A. Application of Commercial Finite Element Codes for the Analysis of Induced Strain-Actuated Structures, *2nd International Conference on Intelligent Materials*, edited by C.A. Rogers and G.G. Wallace, Technomic, Lancaster, PA, 1994, pp.846–855.