

RINGER FREQ. _____

CODE No. **N802**


ASA

NOTES:

- 1-"X" CONTACTS TO BREAK FIRST AND MAKE LAST.
- 2-IF BELLS TAP WHEN DIALING FROM ANOTHER TELEPHONE ON THE LINE REVERSE RINGER CONNECTIONS AT TERMINALS 8 & 9.
- 3-IF NO DIAL IS USED PLACE BOTH BL AND YEL. DIAL WIRES TOGETHER UNDER CENTER SCREW OF DIAL BLANK. INSULATE WH AND RED DIAL WIRES FROM CKT.

4-WIRING AT TERMINAL BLOCK SHOWN FOR METALLIC (BRIDGED) RINGING. FOR GROUND (DIVIDED) RINGING MOVE RED LEAD AT TERMINAL BLOCK FROM TERMINAL L2 TO 4G. TO RING FROM L2 TO GROUND REVERSE LINE LEADS AT TERMINAL BLOCK.

5-TERMINALS DESIGNATED (A),(B) & (C) ARE FOR TESTING PURPOSES. TERMINAL (C) IS NOT USED.

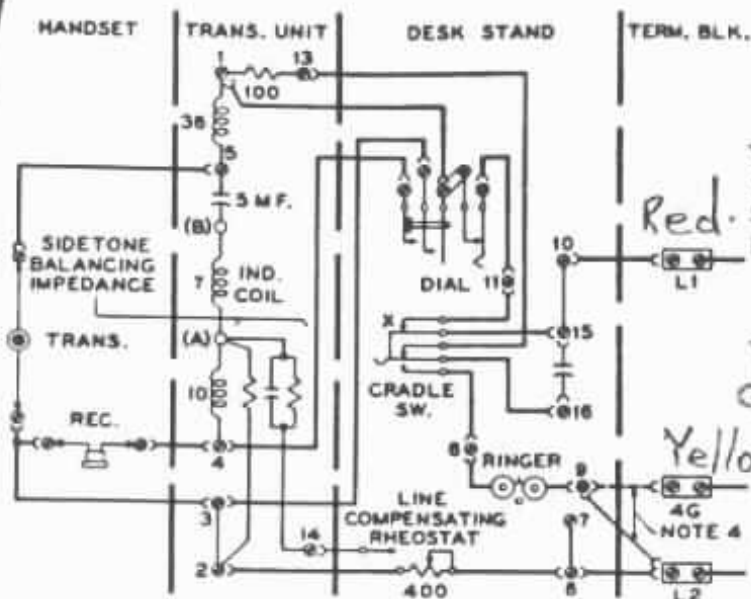

ADDENDUM

THE FOLLOWING NEW COLOR CODE FOR HANDSET AND OF LINE CORD IS USED ON THIS TELEPHONE
RED FOR BLACK
YELLOW FOR RED
GREEN FOR WHITE

