



# STROMBERG-CARLSON CORPORATION

## S-C 500Y/S-C 554Y TELEPHONE

### WIRING DIAGRAM

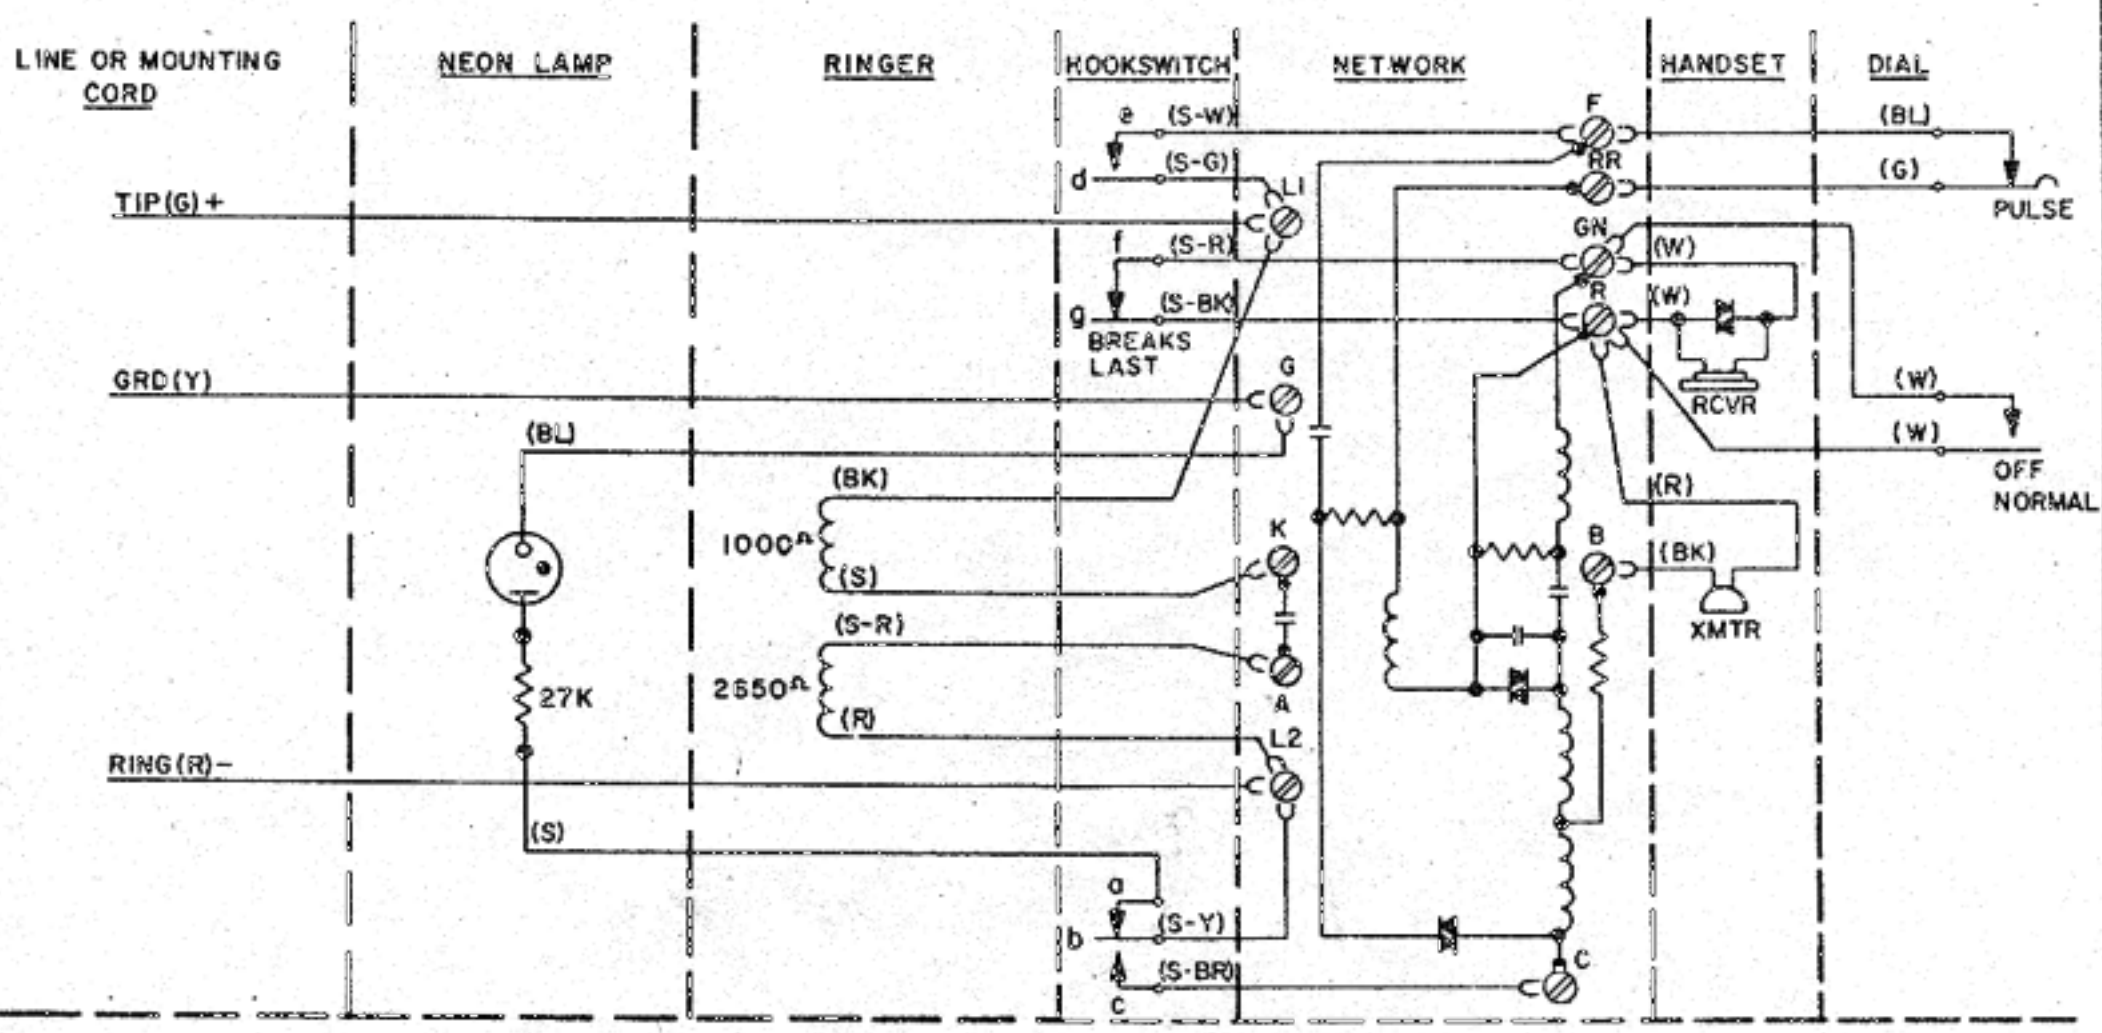

STANDARD CONNECTOR  
BLOCK WIRING

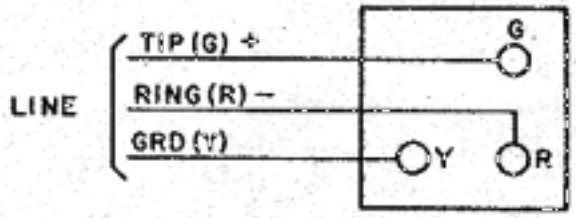

- NOTES:**
1. CONNECTIONS SHOWN FOR 3 WIRE SERVICE. FOR 2 WIRE SERVICE, TRANSFER (BL) NEON LEAD FROM TERMINAL G TO TERMINAL LI.
  2. FOR MANUAL SERVICE REPLACE DIAL WITH APPARATUS BLANK AND ADAPTOR AND TRANSFER (S-W) SWITCH LEAD FROM TERMINAL F TO TERMINAL RR.
  3. TO PERMANENTLY SILENCE RINGER, DISCONNECT (R) RINGER LEAD. INSULATE AND STORE.