

CARPET STRIPS  
3 1/4" X 24 1/2"

SECURE ALL 1x2 STRIPS TO 3/4" PLYWOOD BASE WITH 1 5/8" DRYWALL SCREWS AND GLUE.


SECURE RUBBER MAT IN PLACE WITH 4 ROUND HEAD SCREWS AND AL BAR.

STAPLE OR USE CONTACT CEMENT TO FASTEN THE CARPET IN PLACE

FOAM PAD  
1" THICK

18" X 9" X 1/4"  
RUBBER MAT  
3/4" X 17 1/2"  
ALUMINUM BAR

LANE SEPARATOR  
DETAILS

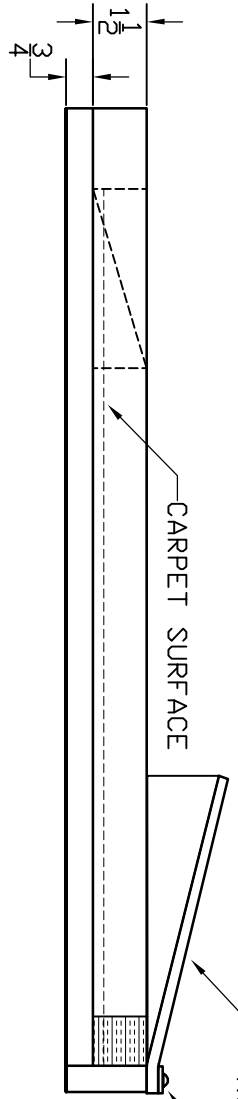

CAR STOP (CARPET TRAP)

UPDATED 18 JAN 2000  
LARRY BOSWORTH