

Round, solder lead type

Series: BCAP



> Features:


- > Dimensions similar to EN 60086-2 & EN 60285
- > Over 500,000 duty cycles
- > 10 year life capability
- > Higher energy vs. electrolytic
- > Higher power vs. batteries
- > Aluminum construction
- > Round, double ended design
- > Ultra-low internal resistance
- > Resistant against reverse polarity
- > UL Recognized

> Applications:

- > Automotive subsystems
- > Heavy duty vehicle subsystems
- > Rail system power
- > Windmill pitch control systems
- > Wireless transmissions



> Dimensions:

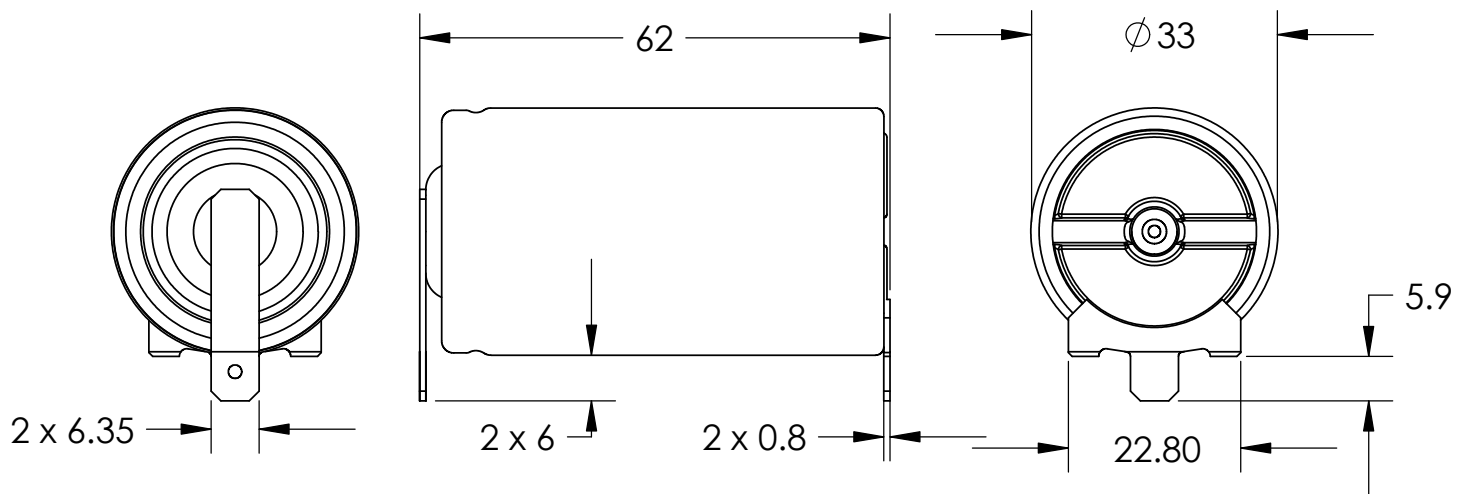

Dimensions, mm					
Case Size	L	OD	Weight [g]	Vol. [l]	Typical package qty.
BCAP0350	62	33	60	0.05	40

Product dimensions and specifications may change without notice. Please contact Maxwell Technologies directly for any technical specifications critical to application.

> Specifications:

	Product Specification		
	BCAP0350	Tolerance	Standard
Mounting	Solder		
Capacitance, C _R [F]	350	+/- 20%	
Voltage, U _R	2.5		
Internal resistance, DC [ohm]	0.0032	+/- 25 %	Discharging at Constant Current (25°C)
Internal resistance, 1 kHz [ohm]	0.0016	+/- 25 %	
Thermal Resistance, R _{th} (°C/W)	10.9		ΔT=DR _{th} I _C ² R _d
Short circuit current, I _{sc} [A]	1500		Caution , current possible with short circuit from U _R
Leakage current [mA]	1		72 hrs, 25°C
Operating temp. range [C]	-40 to 65		
Storage temp. range [C]	-40 to 70		
Endurance, Capacitance [F]	< 20% decrease		1000 hrs @ U _R and 65°C
Endurance, Resistance [ohm]	< 25% increase		
Maximum energy, E _{max} [Wh/kg]	5.1		Full discharge from U _R
Peak Power Density, P _d [W/kg]	16,275		Matched Load
Power Density, P _d [W/kg]	3,900		See additional technical information
Life Time	ΔC/C _R < 20% decrease, ESR < 2 x increase		from initial value after 10y @ 25°C
Cycle Life	ΔC/C _R < 20% decrease, ESR < 2 x increase		from initial value after 500K cycles @ 25°C (I = 5A)

> Markings: Capacitors are marked with the following information


Rated capacitance, Rated voltage, product number, name of manufacturer, UL symbol, positive terminal, negative terminal and warning marking

> Mounting Recommendations:

Cells are designed to be soldered into series or parallel strings.

Components should not be operated outside recommended limits.

Parts can be ordered without tabs.

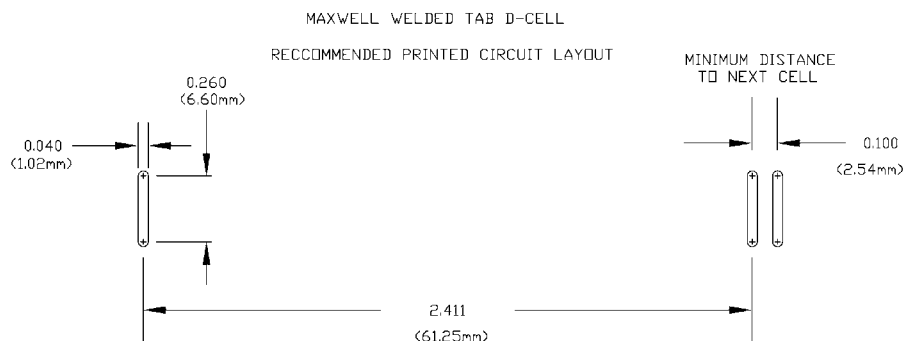

> Additional Technical Information:

$$P_d = (0.12 \times E^2 / R_d) / M$$

$$\Delta T = DR_{th}I_c^2R_d$$

E = charge voltage (U_R)

M = capacitor weight (kg)

D = duty cycle



R_d = internal resistance (DC)

V = capacitor volume (l)

I_c = continuous current

› ΔT - duty cycle vs. operating current:

› Curves generated under free convection at 25°C ambient

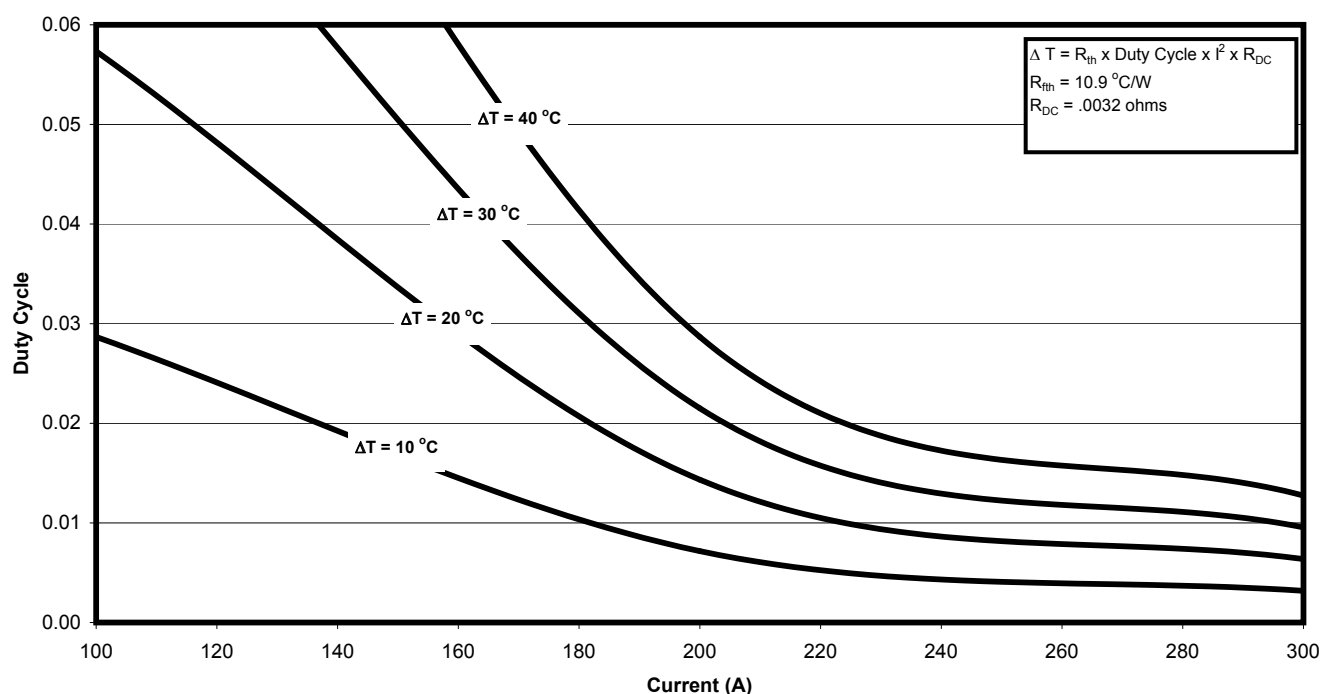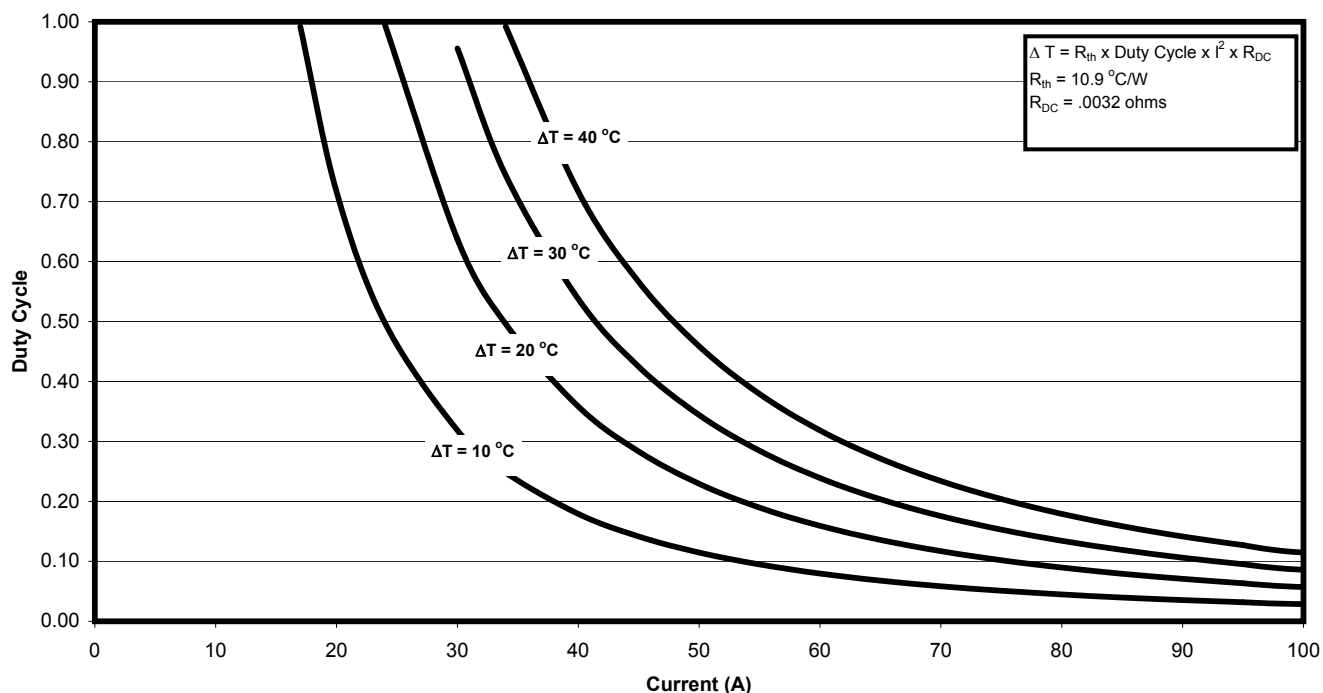

Patent Pending

Worldwide Headquarters

MAXWELL TECHNOLOGIES
9244 Balboa Avenue • San Diego, 92123 CA, USA
PHONE: +1(858) 503 3300
FAX: +1(858) 503 3301
EMAIL: info@maxwell.com

European Office

MAXWELL TECHNOLOGIES SA
CH-1728 Rossens • Switzerland
PHONE: +41 (0) 26 411 85 00
FAX: +41 (0) 26 411 85 05
EMAIL: info@maxwell.com

Maxwell
TECHNOLOGIES
www.maxwell.com