

Step 1:- search bootstrap 5

The screenshot shows a Google search interface. The search bar contains the text "bootstrap 5". Below the search bar, the "All" tab is selected. The search results are displayed below the tabs. The first result is from Bootstrap, titled "Introduction · Bootstrap v5.0". It includes a description: "Get started with **Bootstrap**, the world's most popular framework for building responsive, mobile-first sites, with jsDelivr and a template starter page." Below the description are four buttons: "Quick start", "CSS", "Starter template", and "Important globals". An arrow points to the "Important globals" button with the text "Click here" above it. The second result is also from Bootstrap, titled "Get started with Bootstrap · Bootstrap v5.3". It includes a description: "Get started with **Bootstrap**. Bootstrap is a powerful, feature-packed frontend toolkit. Build anything—from prototype to production—in minutes. [Read more](#)". The third result is from W3Schools, titled "Bootstrap 5 - W3Schools".

Bootstrap

<https://getbootstrap.com/docs/5.0/getting-started/>

Introduction · Bootstrap v5.0

Get started with **Bootstrap**, the world's most popular framework for building responsive, mobile-first sites, with jsDelivr and a template starter page.

[Quick start](#) [CSS](#) [Starter template](#) [Important globals](#)

Click here

Bootstrap

<https://getbootstrap.com/getting-started/introduction/>

Get started with Bootstrap · Bootstrap v5.3

Get started with **Bootstrap**. Bootstrap is a powerful, feature-packed frontend toolkit. Build anything—from prototype to production—in minutes. [Read more](#)

W3Schools

https://www.w3schools.com/bootstrap5/bootstrap_5.php

And you will see this page

Get started with Bootstrap - Bootstrap 5.3.0

getbootstrap.com/docs/5.3/getting-started/introduction/

Docs Examples Icons Blog Search

Getting started

- Introduction
- Download
- Contents
- Browsers & devices
- JavaScript
- Webpack
- Parcel
- Vite
- Accessibility
- RFS
- RTL
- Contribute

Customize

- Overview
- Sass
- Options
- Color
- Color modes
- Components

```
<h1>Hello, world!</h1>
</body>
</html>
```

2. **Include Bootstrap's CSS and JS.** Place the `<link>` tag in the `<head>` for our CSS, and the `<script>` tag for our JavaScript bundle (including Popper for positioning dropdowns, popovers, and tooltips) before the closing `</body>`. Learn more about our [CDN links](#).

```
<!doctype html>
<html lang="en">
  <head>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1">
    <title>Bootstrap demo</title>
    <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.8/dist/css/bootstrap.min.css" rel="stylesheet">
  </head>
  <body>
    <h1>Hello, world!</h1>
    <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.8/dist/js/bootstrap.bundle.min.js"></script>
  </body>
</html>
```

You can also include [Popper](#) and our JS separately. If you don't plan to use dropdowns, popovers, or tooltips, save some kilobytes by not including Popper.

Click to copy code and paste inside notepad++ or in vs code studio.

Step 2:- enter container as shown below.

```
<!doctype html>
<html lang="en">
<head>
<meta charset="utf-8">
<meta name="viewport" content="width=device-width, initial-scale=1">
<title>Bootstrap demo</title>
<link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.8/dist/css/bootstrap.min.css" rel="stylesheet"
</head>
<body>
<section>
<div class ="container">


</div>

</body>
</html>
```

Step 2:- enter row inside container as shown below

```
1 <!doctype html>
2 <html lang="en">
3 <head>
4 <meta charset="utf-8">
5 <meta name="viewport" content="width=device-width, initial-scale=1">
6 <title>Bootstrap demo</title>
7 <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.8/dist/css/bootstrap.min.css" rel="stylesheet" integrity="sha384-sRI14kxII
8 </head>
9 <body>
10 <section>
11 <div class ="container">
12 <div class="row">
13
14
15
16
17
18
19
20
21
22 </div>
23 </div>
24 </body>
25 </html>
26
27
28
29
```

Step 3:- Enter Columns first and second inside row as shown below :-

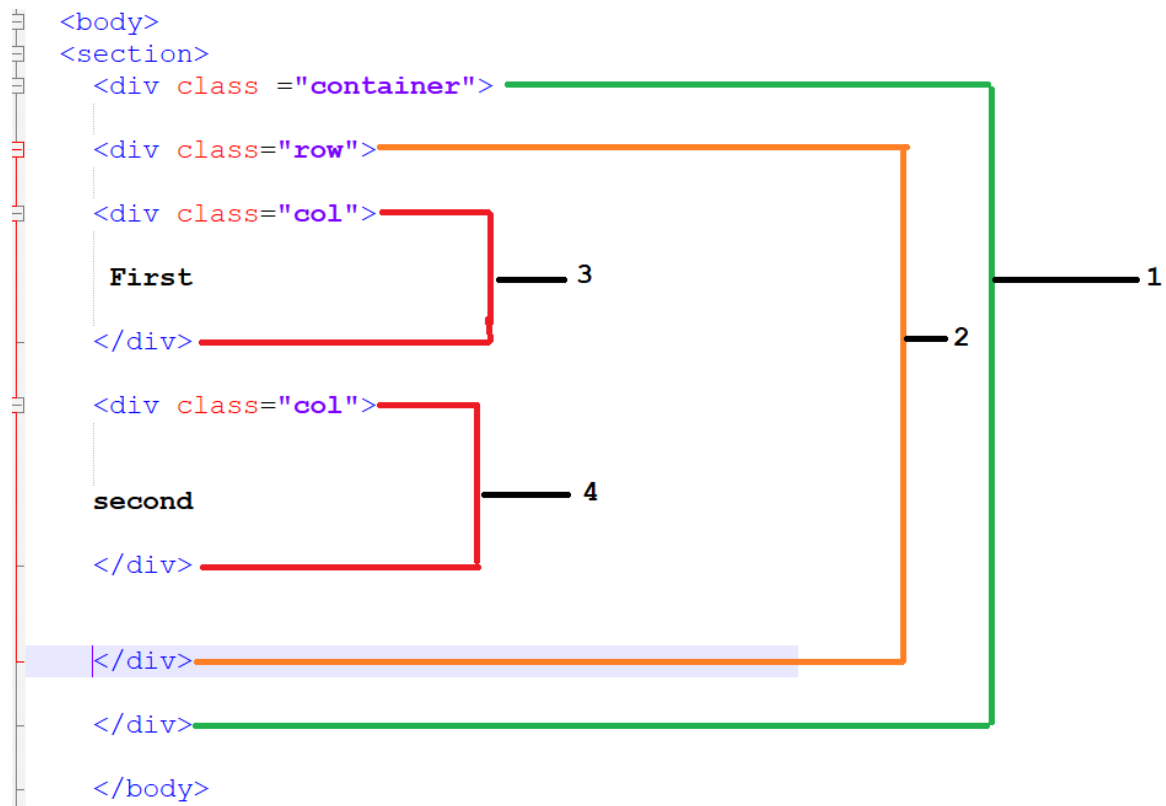

Output:-

'b1.html

First

second