

Starter template:-

Be sure to have your pages set up with the latest design and development standards. That means using an HTML5 doctype and including a viewport meta tag for proper responsive behaviors. Put it all together and your pages should look like this:

```
<!doctype html>
<html lang="en">
  <head>
    <!-- Required meta tags -->
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1">

    <!-- Bootstrap CSS -->
    <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css" rel="stylesheet"
integrity="sha384-EVSTQN3/azprG1Anm3QDgpJLIm9Nao0Yz1ztcQTwFspd3yD65VohhpuuCOMLASjC"
crossorigin="anonymous">

    <title>Hello, world!</title>
  </head>
  <body>

    <h1>Hello, world!</h1>

    <!-- Optional JavaScript; choose one of the two! -->


    <!-- Option 1: Bootstrap Bundle with Popper -->
    <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.bundle.min.js" integrity="sha384-
MrcW6ZMFYlzcLA8NI+NtUVF0sA7MsXsP1UyJoMp4YLEuNSfAP+JcXn/tWtIaxVXM"
crossorigin="anonymous"></script>

    <!-- Option 2: Separate Popper and Bootstrap JS -->
    <!--
    <script src="https://cdn.jsdelivr.net/npm/@popperjs/core@2.9.2/dist/umd/popper.min.js" integrity="sha384-
IQsoLX15PILFhosVNubq5LC7Qb9DXgDA9i+tQ8Zj3iwWAwPtgFTxbJ8NT4GN1R8p"
crossorigin="anonymous"></script>
    <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.min.js" integrity="sha384-
cVKIPhGWic2A14u+LWgxfKTRIfcu0JTxB+EQDz/bglDoEyl4H0zUF0QKbrJ0EcQF"
crossorigin="anonymous"></script>
    -->
  </body>
</html>
```

Dropdowns are toggleable, contextual overlays for displaying lists of links and more. They're made interactive with the included Bootstrap dropdown JavaScript plugin.

Single button

Any single `.btn` can be turned into a dropdown toggle with some markup changes. Here's how you can put them to work with either `<button>` elements:

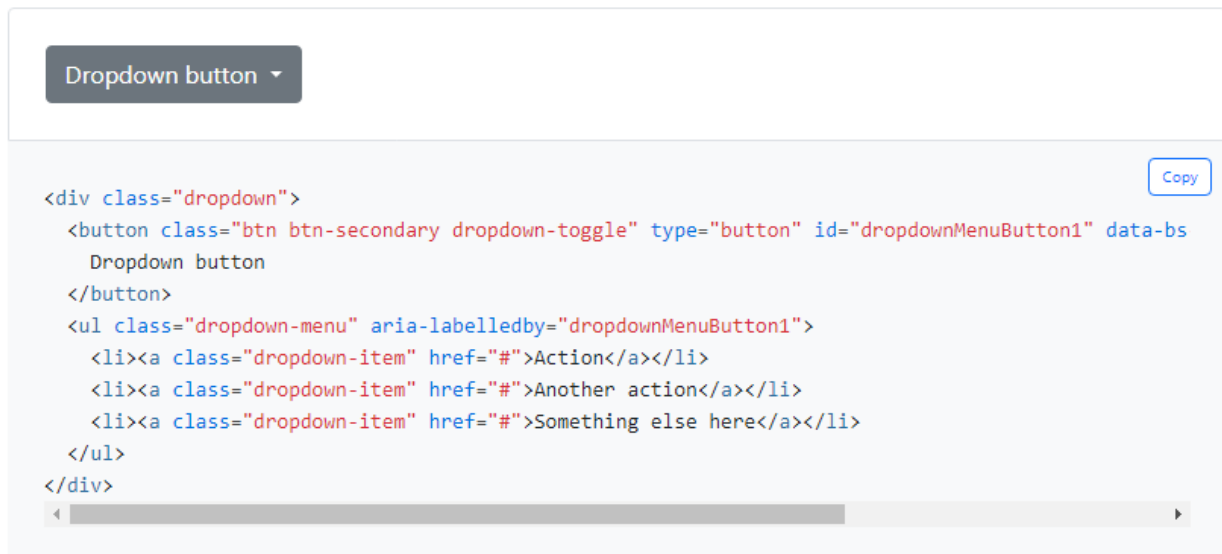

The image shows a visual example of a Bootstrap dropdown button and its underlying HTML code. The visual part shows a dark grey button with the text "Dropdown button" and a small downward arrow. Below it, the HTML code is displayed in a light blue box with a "Copy" button in the top right corner. The code defines a `<div class="dropdown">` containing a `<button class="btn btn-secondary dropdown-toggle" type="button" id="dropdownMenuButton1" data-bs="Dropdown button">` and a `<ul class="dropdown-menu" aria-labelledby="dropdownMenuButton1">` with three list items: "Action", "Another action", and "Something else here".

Example 1 dropdown.html :-

```
<!doctype html>
```

```
<html lang="en">
```

```
<head>
```

```
<!-- Required meta tags -->
```

```
<meta charset="utf-8">
```

```
<meta name="viewport" content="width=device-width, initial-scale=1">
```

```
<!-- Bootstrap CSS -->
```

```
<link href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css"
rel="stylesheet" integrity="sha384-
EVSTQN3/azprG1Anm3QDgplIm9Nao0Yz1ztcQTWfFspd3yD65VohhpuuCOmLASjC"
crossorigin="anonymous">
```

```
<title>Hello, world!</title>
```

```
</head>
```

```
<body>
```

```
<div class="dropdown">
```

```
<button class="btn btn-secondary dropdown-toggle" type="button" id="dropdownMenuButton1"
data-bs-toggle="dropdown" aria-expanded="false">
```

```
Dropdown button
```

```
</button>
```

```
<ul class="dropdown-menu" aria-labelledby="dropdownMenuButton1">
```

```
<li><a class="dropdown-item" href="#">Action</a></li>
```

```
<li><a class="dropdown-item" href="#">Another action</a></li>
```

```
<li><a class="dropdown-item" href="#">Something else here</a></li>
```

```
</ul>
```

```
</div>
```


```
<!-- Option 1: Bootstrap Bundle with Popper -->
```

```
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.bundle.min.js"
integrity="sha384-MrcW6ZMFYlzcLA8NI+NtUVF0sA7MsXsP1UyJoMp4YLEuNSfAP+JcXn/tWtIaxVXM"
crossorigin="anonymous"></script>
```

```
</body>
</html>
```

Navbar

Documentation and examples for Bootstrap's powerful, responsive navigation header, the navbar. Includes support for branding, navigation, and more, including support for our collapse plugin.

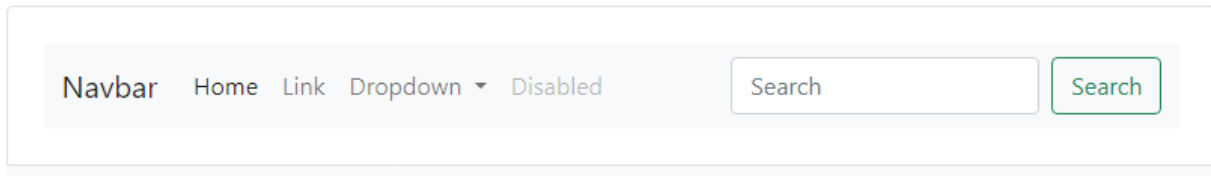

```
<!doctype html>
<html lang="en">
  <head>
    <!-- Required meta tags -->
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1">

    <!-- Bootstrap CSS -->
    <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css"
    rel="stylesheet" integrity="sha384-
    EVSTQN3/azprG1Anm3QDgpJLIm9Nao0Yz1ztcQTwFspd3yD65VohhpuuCOmLASjC"
    crossorigin="anonymous">
```

```

<title>Navbar!</title>

</head>

<body>

<nav class="navbar navbar-expand-lg navbar-light bg-light">
  <div class="container-fluid">
    <a class="navbar-brand" href="#">Navbar</a>
    <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-
target="#navbarSupportedContent" aria-controls="navbarSupportedContent" aria-expanded="false" aria-
label="Toggle navigation">
      <span class="navbar-toggler-icon"></span>
    </button>
    <div class="collapse navbar-collapse" id="navbarSupportedContent">
      <ul class="navbar-nav me-auto mb-2 mb-lg-0">
        <li class="nav-item">
          <a class="nav-link active" aria-current="page" href="#">Home</a>
        </li>
        <li class="nav-item">
          <a class="nav-link" href="#">Link</a>
        </li>
        <li class="nav-item dropdown">
          <a class="nav-link dropdown-toggle" href="#" id="navbarDropdown" role="button" data-bs-
toggle="dropdown" aria-expanded="false">
            Dropdown
          </a>
          <ul class="dropdown-menu" aria-labelledby="navbarDropdown">
            <li><a class="dropdown-item" href="#">Action</a></li>
            <li><a class="dropdown-item" href="#">Another action</a></li>
            <li><hr class="dropdown-divider"></li>
            <li><a class="dropdown-item" href="#">Something else here</a></li>
          </ul>
        </li>
        <li class="nav-item">
          <a class="nav-link disabled" href="#" tabindex="-1" aria-disabled="true">Disabled</a>
        </li>
      </ul>
      <form class="d-flex">
        <input class="form-control me-2" type="search" placeholder="Search" aria-label="Search">
        <button class="btn btn-outline-success" type="submit">Search</button>
      </form>
    </div>
  </div>
</nav>

```

```
<!-- Option 1: Bootstrap Bundle with Popper -->
```

```
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.bundle.min.js"
integrity="sha384-MrcW6ZMFYlzcLA8NI+NtUVF0sA7MsXsP1UyJoMp4YLEuNSfAP+JcXn/tWtIaxVXM"
crossorigin="anonymous"></script>
```

```
</body>
```

```
</html>
```

Modal


Use Bootstrap's JavaScript modal plugin to add dialogs to your site for lightboxes, user notifications, or completely custom content.

Toggle a working modal demo by clicking the button below. It will slide down and fade in from the top of the page.



Launch demo modal

After click on above we will see following as shown below

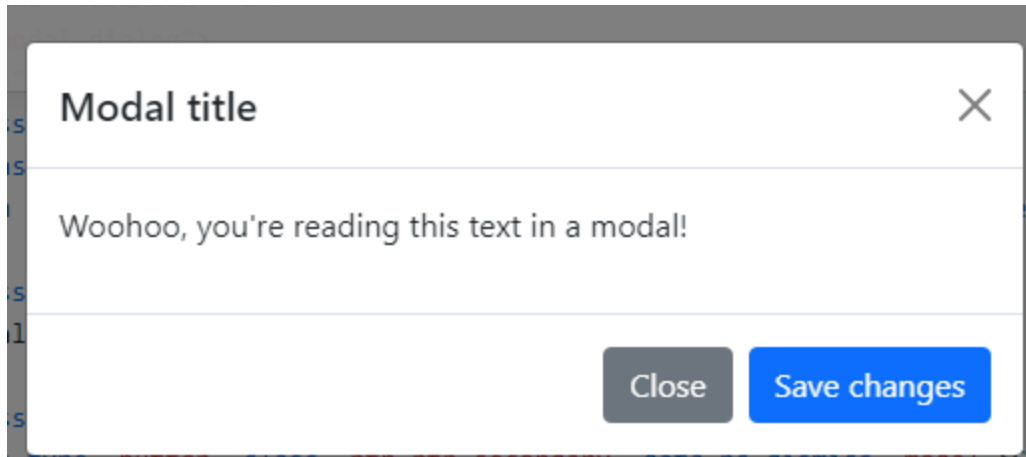

Example Modal.html :-

```
<!doctype html>
<html lang="en">
  <head>
    <!-- Required meta tags -->
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1">

    <!-- Bootstrap CSS -->
    <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css"
rel="stylesheet" integrity="sha384-
EVSTQN3/azprG1Anm3QDgpJLIm9Nao0Yz1ztcQTWFspd3yD65VohhpuuCOmLASjC"
crossorigin="anonymous">

    <title>Modal !</title>
  </head>
  <body>
```

```
<!-- Button trigger modal -->
<button type="button" class="btn btn-primary" data-bs-toggle="modal" data-bs-target="#exampleModal">
  Launch demo modal
</button>
```

```
<!-- Modal -->
<div class="modal fade" id="exampleModal" tabindex="-1" aria-labelledby="exampleModalLabel" aria-
hidden="true">
  <div class="modal-dialog">
    <div class="modal-content">
      <div class="modal-header">
        <h5 class="modal-title" id="exampleModalLabel">Modal title</h5>
        <button type="button" class="btn-close" data-bs-dismiss="modal" aria-label="Close"></button>
      </div>
      <div class="modal-body">
        ...
      </div>
      <div class="modal-footer">
        <button type="button" class="btn btn-secondary" data-bs-dismiss="modal">Close</button>
        <button type="button" class="btn btn-primary">Save changes</button>
      </div>
    </div>
  </div>
</div>
```

```
<!-- Option 1: Bootstrap Bundle with Popper -->
```

```
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.bundle.min.js"
integrity="sha384-MrcW6ZMFYlzcLA8NI+NtUVF0sA7MsXsP1UyJoMp4YLEuNSfAP+JcXn/tWtIaxVXM"
crossorigin="anonymous"></script>
```


```
</body>
```

```
</html>
```

Carousel

A slideshow component for cycling through elements—images or slides of text—like a carousel.

Slider :-

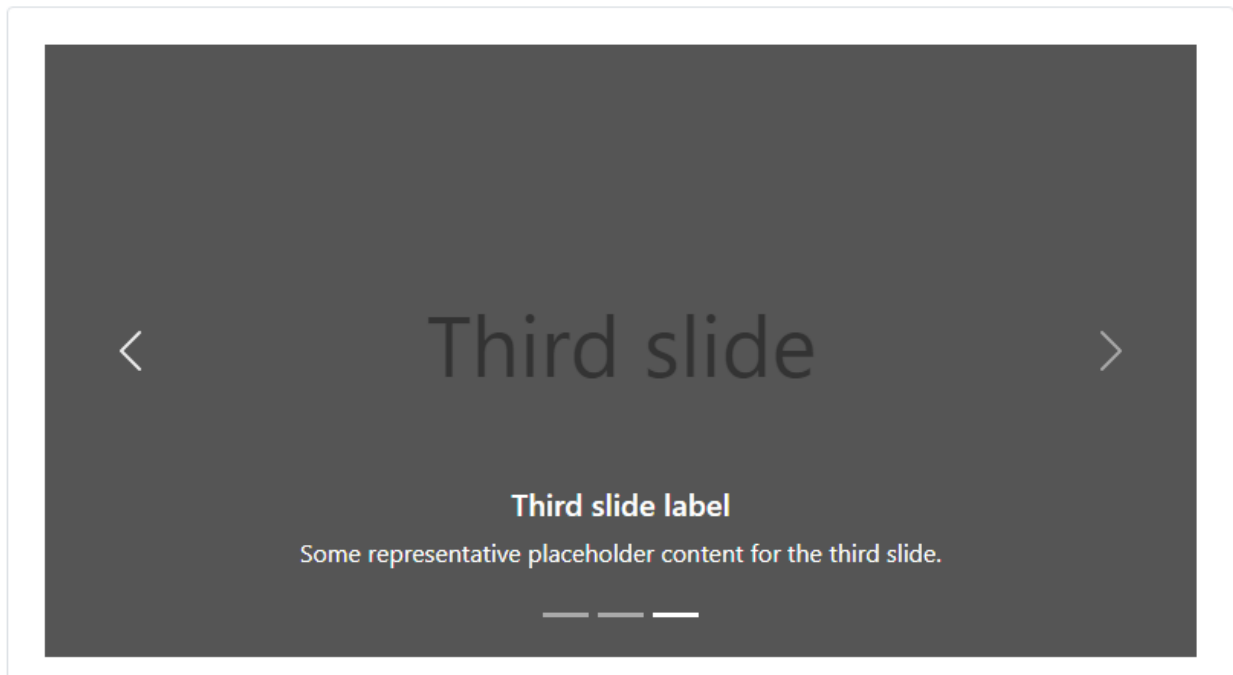

```
<!doctype html>
```

```
<html lang="en">
```

```
<head>
```

```
<!-- Required meta tags -->
```

```
<meta charset="utf-8">
```

```
<meta name="viewport" content="width=device-width, initial-scale=1">
```

```
<!-- Bootstrap CSS -->
```

```
<link href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/css/bootstrap.min.css"
rel="stylesheet" integrity="sha384-
```

EVSTQN3/azprG1Anm3QDgpJlIm9Nao0Yz1ztcQTwFspd3yD65VohhpuuCOmLASjC"
crossorigin="anonymous">

```
<title>slider !</title>

</head>

<body>

<div id="carouselExampleCaptions" class="carousel slide" data-bs-ride="carousel">
  <div class="carousel-indicators">
    <button type="button" data-bs-target="#carouselExampleCaptions" data-bs-slide-to="0" class="active" aria-
current="true" aria-label="Slide 1"></button>
    <button type="button" data-bs-target="#carouselExampleCaptions" data-bs-slide-to="1" aria-label="Slide
2"></button>
    <button type="button" data-bs-target="#carouselExampleCaptions" data-bs-slide-to="2" aria-label="Slide
3"></button>
  </div>
  <div class="carousel-inner">
    <div class="carousel-item active">
      
      <div class="carousel-caption d-none d-md-block">
        <h5>First slide label</h5>
        <p>Some representative placeholder content for the first slide.</p>
      </div>
    </div>
    <div class="carousel-item">
      
      <div class="carousel-caption d-none d-md-block">
        <h5>Second slide label</h5>
        <p>Some representative placeholder content for the second slide.</p>
      </div>
    </div>
    <div class="carousel-item">
      
      <div class="carousel-caption d-none d-md-block">
        <h5>Third slide label</h5>
        <p>Some representative placeholder content for the third slide.</p>
      </div>
    </div>
  </div>
  <button class="carousel-control-prev" type="button" data-bs-target="#carouselExampleCaptions" data-bs-
slide="prev">
    <span class="carousel-control-prev-icon" aria-hidden="true"></span>
    <span class="visually-hidden">Previous</span>
  </button>
  <button class="carousel-control-next" type="button" data-bs-target="#carouselExampleCaptions" data-bs-
slide="next">
    <span class="carousel-control-next-icon" aria-hidden="true"></span>
    <span class="visually-hidden">Next</span>
  </button>
</div>
```

<!-- Option 1: Bootstrap Bundle with Popper -->

```
<script src="https://cdn.jsdelivr.net/npm/bootstrap@5.0.2/dist/js/bootstrap.bundle.min.js"
integrity="sha384-MrcW6ZMFYlzcLA8NI+NtUVF0sA7MsXsP1UyJoMp4YLEuNSfAP+JcXn/tWtIaxVXM"
crossorigin="anonymous"></script>
```

</body>

</html>